

Leica GS10/GS15 User Manual



Version 6.0
English

- when it has to be **right**

Leica
Geosystems

Introduction

Purchase

Congratulations on the purchase of a Leica GS10/GS15.



This manual contains important safety directions as well as instructions for setting up the product and operating it. Refer to "1 Safety Directions" for further information. Read carefully through the User Manual before you switch on the product.

Product identification

The type and serial number of your product are indicated on the type plate. Enter the type and serial number in your manual and always refer to this information when you need to contact your agency or Leica Geosystems authorised service workshop.

Type: _____

Serial No.: _____

Trademarks

- Windows is a registered trademark of Microsoft Corporation in the United States and other countries
- *Bluetooth*[®] is a registered trademark of Bluetooth SIG, Inc.
- SD Logo is a trademark of SD-3C, LLC.

All other trademarks are the property of their respective owners.

Validity of this manual

This manual applies to the GS10/GS15.

Available documentation

Name	Description/Format		
GS10/GS15 Quick Guide	Provides an overview of the product together with technical data and safety directions. Intended as a quick reference guide.	✓	✓
GS10/GS15 User Manual	All instructions required in order to operate the product to a basic level are contained in the User Manual. Provides an overview of the product together with technical data and safety directions.	-	✓

Name	Description/Format		
Viva Series Technical Reference Manual	Overall comprehensive guide to the product and application functions. Included are detailed descriptions of special software/hardware settings and software/hardware functions intended for technical specialists.	-	✓

Refer to the following resources for all GS10/GS15 documentation/software:

- the Leica USB documentation card
- <https://myworld.leica-geosystems.com>

myWorld@Leica Geosystems (<https://myworld.leica-geosystems.com>) offers a wide range of services, information and training material.

With direct access to myWorld, you are able to access all relevant services whenever it is convenient for you, 24 hours a day, 7 days per week. This increases your efficiency and keeps you and your equipment instantly updated with the latest information from Leica Geosystems.

Service	Description
myProducts	Add all Leica Geosystems products that you and your company own. View detailed information on your products, buy additional options or Customer Care Packages (CCPs), update your products with the latest software and keep up-to-date with the latest documentation.
myService	View the service history of your products in Leica Geosystems Service Centres and detailed information on the services performed on your products. For your products that are currently in Leica Geosystems Service Centres view the current service status and the expected end date of service.
mySupport	Create new support requests for your products that will be answered by your local Leica Geosystems Support Team. View the complete history of your Support and view detailed information on each request in case you want to refer to previous support requests.
myTraining	Enhance your product knowledge with the Leica Geosystems Campus - Information, Knowledge, Training. Study the latest online training material or download training material on your products. Keep up-to-date with the latest News on your products and register for Seminars or Courses in your country.
myTrustedServices	Offers increased productivity while at the same time providing maximum security. <ul style="list-style-type: none"> • myExchange With myExchange you can exchange any files/objects from your computer to any of your Leica Exchange Contacts. • mySecurity If your instrument is ever stolen, a locking mechanism is available to ensure that the instrument is disabled and can no longer be used.

Table of Contents

In this manual	Chapter	Page
1	Safety Directions	6
1.1	General Introduction	6
1.2	Definition of Use	6
1.3	Limits of Use	6
1.4	Responsibilities	7
1.5	Hazards of Use	7
1.6	Electromagnetic Compatibility EMC	10
1.7	FCC Statement, Applicable in U.S.	12
2	Description of the System	14
2.1	System Components	14
2.2	System Concept	14
2.2.1	Software Concept	14
2.2.2	Power Concept	15
2.2.3	Data Storage Concept	15
2.3	Container Contents	16
2.4	Instrument Components	18
3	User Interface	19
3.1	Keyboard	19
3.2	Operating Principles	21
4	Operation	22
4.1	Equipment Setup	22
4.1.1	Setting up as a Post-Processing Base	22
4.1.2	Setting up as a Real-Time Base	24
4.1.3	Setting up as a Real-Time Rover	27
4.1.4	Using the Backpack	30
4.1.5	Fixing the CS to a Holder and Pole	31
4.1.6	Connecting to a Personal Computer	33
4.1.7	Connecting to the Web Server	36
4.1.8	Configuring the Instrument	38
4.2	Batteries	39
4.2.1	Operating Principles	39
4.2.2	Battery for GS10	39
4.2.3	Battery for GS15	40
4.3	Working with the Memory Device	40
4.4	Working with the RTK Device	43
4.4.1	GS10	43
4.4.2	GS15	47
4.5	LED Indicators on GS10/GS15	50
4.6	Guidelines for Correct Results with GNSS Surveys	51
5	Care and Transport	52
5.1	Transport	52
5.2	Storage	52
5.3	Cleaning and Drying	53

6	Technical Data	54
6.1	GS10/GS15 Technical Data	54
6.1.1	Tracking Characteristics	54
6.1.2	Accuracy	55
6.1.3	Technical Data	56
6.2	Antennas Technical Data	59
6.3	Conformity to National Regulations	62
6.3.1	GS10	62
6.3.2	GS15	63
6.3.3	GFU24, Siemens MC75	64
6.3.4	GFU19 (US), GFU25 (CAN) CDMA MultiTech MTMMC-C	65
6.3.5	GFU28, Telit UC864-G	66
6.3.6	GFU29, Cinterion PXS8	67
6.3.7	SLR1, SLR2, SATEL SATELLINE-3AS	68
6.3.8	SLR5, SATEL SATELLINE M3-TR1	69
6.3.9	SLR3-1, SLR3-2, Pacific Crest ADL	70
6.3.10	SLG1, Telit UC864-G	71
6.3.11	SLG2, CINTERION MC75i	72
6.3.12	SLC1 (US), SLC2 (US) CDMA Telit CC864-DUAL	73
7	Software Licence Agreement	74
Appendix A	Pin Assignments and Sockets	75
A.1	GS10	75
A.2	GS15	76

1 Safety Directions

1.1 General Introduction

Description The following directions enable the person responsible for the product, and the person who actually uses the equipment, to anticipate and avoid operational hazards.

The person responsible for the product must ensure that all users understand these directions and adhere to them.

1.2 Definition of Use

Intended use

- Computing with software.
- Carrying out measurement tasks using various GNSS measuring techniques.
- Recording GNSS and point related data.
- Data communication with external appliances.
- Measuring raw data and computing coordinates using carrier phase and code signal from GNSS satellites.

Reasonably foreseeable misuse

- Use of the product without instruction.
- Use outside of the intended use and limits.
- Disabling safety systems.
- Removal of hazard notices.
- Opening the product using tools, for example screwdriver, unless this is permitted for certain functions.
- Modification or conversion of the product.
- Use after misappropriation.
- Use of products with recognisable damages or defects.
- Use with accessories from other manufacturers without the prior explicit approval of Leica Geosystems.
- Inadequate safeguards at the working site.
- Controlling of machines, moving objects or similar monitoring application without additional control- and safety installations.

1.3 Limits of Use

Environment Suitable for use in an atmosphere appropriate for permanent human habitation: not suitable for use in aggressive or explosive environments.



DANGER

Local safety authorities and safety experts must be contacted before working in hazardous areas, or close to electrical installations or similar situations by the person in charge of the product.

1.4 Responsibilities

Manufacturer of the product

Leica Geosystems AG, CH-9435 Heerbrugg, hereinafter referred to as Leica Geosystems, is responsible for supplying the product, including the user manual and original accessories, in a safe condition.

Person responsible for the product

The person responsible for the product has the following duties:

- To understand the safety instructions on the product and the instructions in the user manual.
- To ensure that it is used in accordance with the instructions.
- To be familiar with local regulations relating to safety and accident prevention.
- To inform Leica Geosystems immediately if the product and the application becomes unsafe.
- To ensure that the national laws, regulations and conditions for the operation of e.g. radio transmitters or lasers are respected.

1.5 Hazards of Use



CAUTION

Watch out for erroneous measurement results if the product has been dropped or has been misused, modified, stored for long periods or transported.

Precautions:

Periodically carry out test measurements and perform the field adjustments indicated in the user manual, particularly after the product has been subjected to abnormal use and before and after important measurements.



DANGER

Because of the risk of electrocution, it is dangerous to use poles and extensions in the vicinity of electrical installations such as power cables or electrical railways.

Precautions:

Keep at a safe distance from electrical installations. If it is essential to work in this environment, first contact the safety authorities responsible for the electrical installations and follow their instructions.



WARNING

During dynamic applications, for example stakeout procedures there is a danger of accidents occurring if the user does not pay attention to the environmental conditions around, for example obstacles, excavations or traffic.

Precautions:

The person responsible for the product must make all users fully aware of the existing dangers.



WARNING

Inadequate securing of the working site can lead to dangerous situations, for example in traffic, on building sites, and at industrial installations.

Precautions:

Always ensure that the working site is adequately secured. Adhere to the regulations governing safety and accident prevention and road traffic.

**CAUTION**

If the accessories used with the product are not properly secured and the product is subjected to mechanical shock, for example blows or falling, the product may be damaged or people can sustain injury.

Precautions:

When setting-up the product, make sure that the accessories are correctly adapted, fitted, secured, and locked in position.

Avoid subjecting the product to mechanical stress.

**WARNING**

Incorrect fastening of the external antenna to vehicles or transporters poses the risk of the equipment being broken by mechanical influence, vibration or airstream. This may result in accident and physical injury.

Precautions:

Attach the external antenna professionally. The external antenna must be secured additionally, for example by use of a safety cord. Ensure that the mounting device is correctly mounted and able to carry the weight of the external antenna (>1 kg) safely.

**WARNING**

If the product is used with accessories, for example masts, staffs, poles, you may increase the risk of being struck by lightning.

Precautions:

Do not use the product in a thunderstorm.

**DANGER**

If the product is used with accessories, for example on masts, staffs, poles, you may increase the risk of being struck by lightning. Danger from high voltages also exists near power lines. Lightning, voltage peaks, or the touching of power lines can cause damage, injury and death.

Precautions:

- Do not use the product in a thunderstorm as you can increase the risk of being struck by lightning.
 - Be sure to remain at a safe distance from electrical installations. Do not use the product directly under or close to power lines. If it is essential to work in such an environment contact the safety authorities responsible for electrical installations and follow their instructions.
 - If the product has to be permanently mounted in an exposed location, it is advisable to provide a lightning conductor system. A suggestion on how to design a lightning conductor for the product is given below. Always follow the regulations in force in your country regarding grounding antennas and masts. These installations must be carried out by an authorised specialist.
 - To prevent damages due to indirect lightning strikes (voltage spikes) cables, for example for antenna, power source or modem should be protected with appropriate protection elements, like a lightning arrester. These installations must be carried out by an authorised specialist.
 - If there is a risk of a thunderstorm, or if the equipment is to remain unused and unattended for a long period, protect your product additionally by unplugging all systems components and disconnecting all connecting cables and supply cables, for example, instrument - antenna.
-

Lightning conductors

Suggestion for design of a lightning conductor for a GNSS system:

1) On non-metallic structures


Protection by air terminals is recommended. An air terminal is a pointed solid or tubular rod of conducting material with proper mounting and connection to a conductor. The position of four air terminals can be uniformly distributed around the antenna at a distance equal to the height of the air terminal.

The air terminal diameter should be 12 mm for copper or 15 mm for aluminium. The height of the air terminals should be 25 cm to 50 cm. All air terminals should be connected to the down conductors. The diameter of the air terminal should be kept to a minimum to reduce GNSS signal shading.

2) On metallic structures


Protection is as described for non-metallic structures, but the air terminals can be connected directly to the conducting structure without the need for down conductors.

Air terminal arrangement, plan view



- a) Antenna
- b) Support structure
- c) Air terminal

Grounding the instrument/antenna

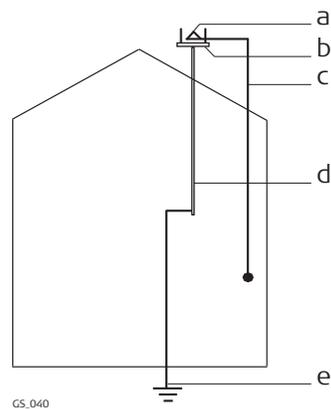

- a) Antenna
- b) Lightning conductor array
- c) Antenna/instrument connection
- d) Metallic mast
- e) Connection to earth



CAUTION

During the transport, shipping or disposal of batteries it is possible for inappropriate mechanical influences to constitute a fire hazard.

Precautions:

Before shipping the product or disposing of it, discharge the batteries by running the product until they are flat.

When transporting or shipping batteries, the person in charge of the product must ensure that the applicable national and international rules and regulations are observed. Before transportation or shipping contact your local passenger or freight transport company.



WARNING

High mechanical stress, high ambient temperatures or immersion into fluids can cause leakage, fire or explosions of the batteries.

Precautions:

Protect the batteries from mechanical influences and high ambient temperatures. Do not drop or immerse batteries into fluids.

**WARNING**

If battery terminals are short circuited e.g. by coming in contact with jewellery, keys, metalized paper or other metals, the battery can overheat and cause injury or fire, for example by storing or transporting in pockets.


Precautions:

Make sure that the battery terminals do not come into contact with metallic objects.

**WARNING**

If the product is improperly disposed of, the following can happen:

- If polymer parts are burnt, poisonous gases are produced which may impair health.
- If batteries are damaged or are heated strongly, they can explode and cause poisoning, burning, corrosion or environmental contamination.
- By disposing of the product irresponsibly you may enable unauthorised persons to use it in contravention of the regulations, exposing themselves and third parties to the risk of severe injury and rendering the environment liable to contamination.

Precautions:

The product must not be disposed with household waste.

Dispose of the product appropriately in accordance with the national regulations in force in your country.

Always prevent access to the product by unauthorised personnel.

Product-specific treatment and waste management information can be downloaded from the Leica Geosystems home page at <http://www.leica-geosystems.com/treatment> or received from your Leica Geosystems dealer.

**WARNING**

Only Leica Geosystems authorised service workshops are entitled to repair these products.

1.6**Electromagnetic Compatibility EMC****Description**

The term Electromagnetic Compatibility is taken to mean the capability of the product to function smoothly in an environment where electromagnetic radiation and electrostatic discharges are present, and without causing electromagnetic disturbances to other equipment.

**WARNING**

Electromagnetic radiation can cause disturbances in other equipment.

Although the product meets the strict regulations and standards which are in force in this respect, Leica Geosystems cannot completely exclude the possibility that other equipment may be disturbed.

**CAUTION**

There is a risk that disturbances may be caused in other equipment if the product is used with accessories from other manufacturers, for example field computers, personal computers or other electronic equipment, non-standard cables or external batteries.

Precautions:

Use only the equipment and accessories recommended by Leica Geosystems. When combined with the product, they meet the strict requirements stipulated by the guidelines and standards. When using computers or other electronic equipment, pay attention to the information about electromagnetic compatibility provided by the manufacturer.

**CAUTION**

Disturbances caused by electromagnetic radiation can result in erroneous measurements.

Although the product meets the strict regulations and standards which are in force in this respect, Leica Geosystems cannot completely exclude the possibility that the product may be disturbed by intense electromagnetic radiation, for example, near radio transmitters, two-way radios or diesel generators.

Precautions:

Check the plausibility of results obtained under these conditions.

**CAUTION**

If the product is operated with connecting cables attached at only one of their two ends, for example external supply cables, interface cables, the permitted level of electromagnetic radiation may be exceeded and the correct functioning of other products may be impaired.

Precautions:

While the product is in use, connecting cables, for example product to external battery, product to computer, must be connected at both ends.

Radios or digital cellular phones**WARNING**

Use of product with radio or digital cellular phone devices:

Electromagnetic fields can cause disturbances in other equipment, in installations, in medical devices, for example pacemakers or hearing aids and in aircraft. It can also affect humans and animals.

Precautions:

Although the product meets the strict regulations and standards which are in force in this respect, Leica Geosystems cannot completely exclude the possibility that other equipment can be disturbed or that humans or animals can be affected.

- Do not operate the product with radio or digital cellular phone devices in the vicinity of filling stations or chemical installations, or in other areas where an explosion hazard exists.
 - Do not operate the product with radio or digital cellular phone devices near to medical equipment.
 - Do not operate the product with radio or digital cellular phone devices in aircraft.
-



The greyed paragraph below is only applicable for products without radio.



WARNING

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



WARNING

Changes or modifications not expressly approved by Leica Geosystems for compliance could void the user's authority to operate the equipment.

Labelling GS10


Type: S.No.:
 Art.No.:
 Equi.No.:
 Power:
 Leica Geosystems AG
 CH-9435 Heerbrugg
 Manufactured:
 Made in Switzerland

FCC-ID: IC:
 Contains transmitter module:
 FCC-ID:
 Bluetooth QPL:

CE


25

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation.

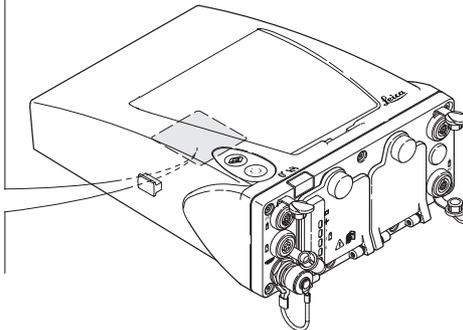

GS_096

Labelling internal battery GEB222



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

UL US LISTED
 ITE Accessory
 E179078 . 70YL

GEB_002

Labelling GS15



005041_001

Type: GS15	S.No.: 1234567
Equi.No.: 1234567	Art.No.: 7XXXXX
Power: 12V nominal/0.5 A max.	CE 0681
Leica Geosystems AG CH-9435 Heerbrugg	IC: 6850A-31308 Contains transmitter module:
Manufactured: 20XX	FCC-ID: Q231308
Made in Switzerland	Bluetooth QD ID: B015912

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation.





 2022WW105669723

Labelling internal battery GEB212



005044_001

Type: GEB212	Art.No.: 772806
Li-Ion Battery: 7.4V \equiv /2.6Ah	CE
\equiv 10A \neq 5A/130°C 19Wh	UL LISTED
Leica Geosystems AG, CH-9435 Heerbrugg	ITE Accessory
Manufactured: 20XX	S.No: 0118 Made in China

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.


 E179078.TDYL

2 Description of the System

2.1 System Components

Main components

Component	Description
Instrument	To calculate a position from the computed ranges to all visible GNSS (Global Navigation Satellite System) satellites.
Web server	Web-based tool to preprogram the GNSS instrument.
Antenna	To receive the satellite signals from the GNSS satellites.
Leica Geo Office	The office software including a series of help programs which support working with Leica Viva Series instruments.

Instruments

Depending on the satellite systems and signals configured, a maximum number of 120 channels is allocated.

Instrument	Description
GS10/GS15	GPS, GLONASS, BeiDou and Galileo GNSS receiver, triple frequency, SBAS (EGNOS, WAAS, GAGAN, MSAS, QZSS), code and phase, real-time capable

2.2 System Concept

2.2.1 Software Concept

Description

All instruments use the same software concept.

Software for all GS GNSS instruments

Software type	Description
GS firmware (GS_xx.fw)	This important software covers all functions of the instrument. The Web server application is integrated into the firmware and cannot be deleted. The English language is integrated into the firmware and cannot be deleted.
Language software (WEB_LANG.sxx)	Numerous languages are available for the Web server application. The English language is the default language. One language is chosen as the active language.

Software upload



Uploading GS firmware can take some time. Ensure that the battery is at least 75% full before beginning the upload, and do not remove the battery during the upload process.

Software for	Description
All GS models	The software can be uploaded using the Leica Web server application or myWorld@Leica Geosystems.  Ensure that a Leica SD card is inserted into the GS instrument before starting the upload. Refer to "4.3 Working with the Memory Device".

2.2.2

Power Concept

General

Use the batteries, chargers and accessories recommended by Leica Geosystems to ensure the correct functionality of the instrument.

Power options

Power for the instrument can be supplied either internally or externally. Up to two external power supplies can be connected.

Internal power supply:

Two batteries (for GS10: GEB221 or GEB222; for GS15: GEB211 or GEB212) fit into the instrument.



If one battery fails, a system shutdown of the GS10/GS15 GNSS instrument will be prevented by switching over directly to the second battery.

External power supply:

GEB171 battery connected via a cable.

OR

Car battery connected via a converter cable supplied by Leica Geosystems.

OR

10.5 V-28 V DC power supply via a converter cable supplied by Leica Geosystems.

OR

110 V/240 V AC to 12 V DC power supply unit, supplied by Leica Geosystems.



For permanent operations use **Uninterruptible Power Supply** units as a back-up in a main power failure.

2.2.3

Data Storage Concept

Description

Data (Leica GNSS raw data and RINEX data) can be recorded on the SD card.

Memory device

SD card:

All GS GNSS instruments have an SD card slot fitted as standard. An SD card can be inserted and removed. Available capacity: 1 GB.



While other SD cards can be used, Leica Geosystems recommends to only use Leica SD cards and is not responsible for data loss or any other error that can occur while using a non-Leica card.



Unplugging connecting cables, removing the data storage device or interrupting the power supply during the measurement can cause loss of data. Only remove the data storage device, unplug connecting cables or interrupt the power supply when the GS GNSS instrument is switched off.




SD cards can directly be used in an OMNI drive as supplied by Leica Geosystems. Other PC card drives can require an adaptor.

2.3


Container Contents

Container for GS10 instrument and accessories part 1 of 2

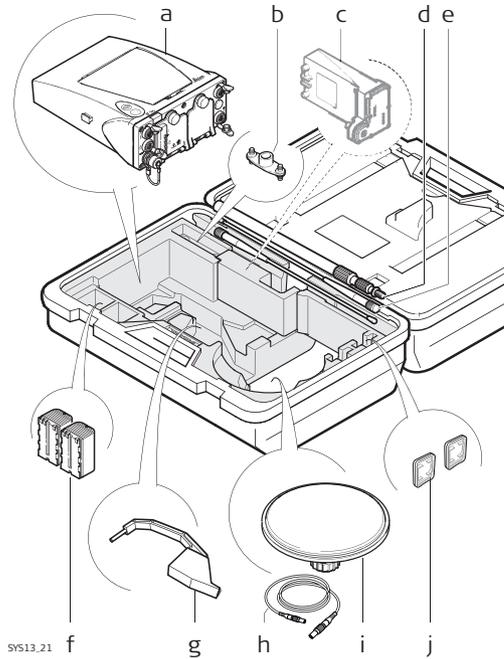


- a) GS10 instrument
- b) Single/double arm for antennas of devices
- c) GFU device such as radio
- d) Antennas of device
- e) GAD32 telescopic rod
- f) GEB222 batteries
- g) Height hook
- h) Cables
- i) Antenna and GAD31 adapter
- j) SD cards

Container for GS10 instrument and accessories part 2 of 2

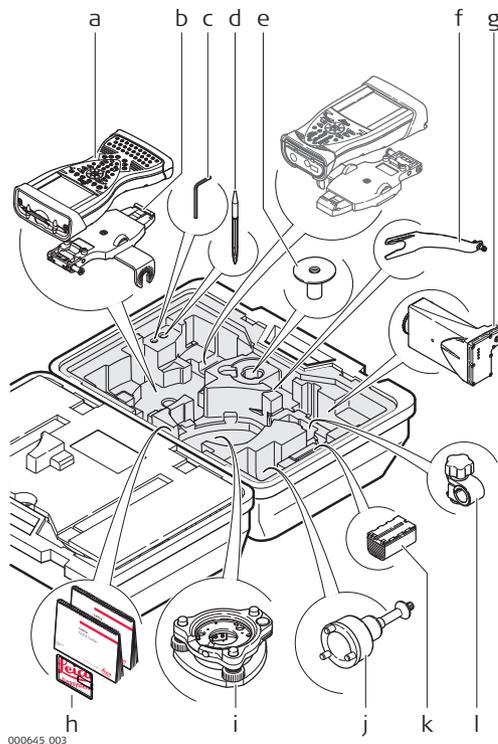


- a) CS15 field controller
- b) GHT62 holder for CS field controller on pole
- c) Allen key
- d) Supplied stylus
- e) GHT36 base for telescopic rod
- f) GAD33 arm 15 cm
- g) GFU device such as radio
- h) Manual & USB documentation card
- i) Tribrach
- j) GRT146 carrier
- k) GEB222 battery
- l) GHT63 clamp

**Container for GS15
instrument and
accessories
part 1 of 2**

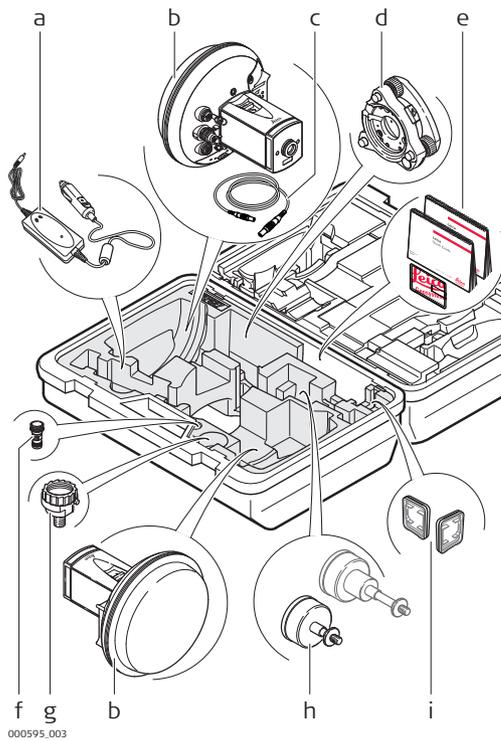

- a) GDC221 car adapter
- b) GS15 instrument
- c) Cables
- d) Tribrach
- e) Manuals and USB documentation card
- f) TNC QN-adaptor
- g) GAD31 adapter
- h) GRT247 carrier
- i) SD cards

**Container for GS15
instrument and
accessories
part 2 of 2**

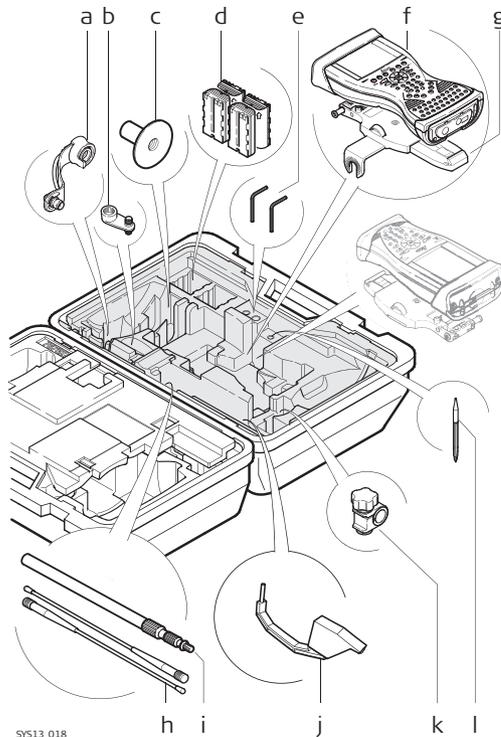

- a) GAD108 arm
- b) GAD34 arm 3 cm
- c) GHT36 base for telescopic rod
- d) GEB211/GEB212 batteries
- e) Allen key
- f) CS field controller
- g) GHT62 holder for CS field controller on pole
- h) Antennas of device
- i) GAD32 telescopic rod
- j) Height hook
- k) GHT63 clamp
- l) Supplied stylus


2.4

Instrument Components




The instrument can be preprogrammed using the Web server application running from the instrument on a web browser of a Windows device. In this case, the instrument is turned on by holding down the ON/OFF button for 2 s or off by holding down the ON/OFF button for 2 s. A green steady light at the power LED indicates that the instrument is turned on.

GS10 components

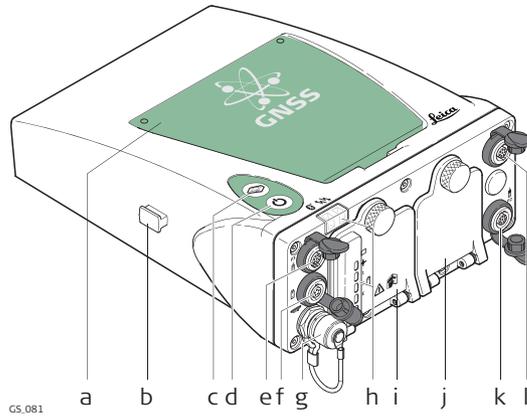

- a) Bluetooth antenna
- b) Guide rail for clip-on-housing of a device (available on both sides)
- c) Function button
- d) ON/OFF button
- e) LEMO port P3
- f) Power port
- g) Antenna port
- h) LED indicators
- i) Battery compartment A including SD card compartment
- j) Battery compartment B
- k) LEMO port P2
- l) LEMO port P1 including USB port

GS15 components

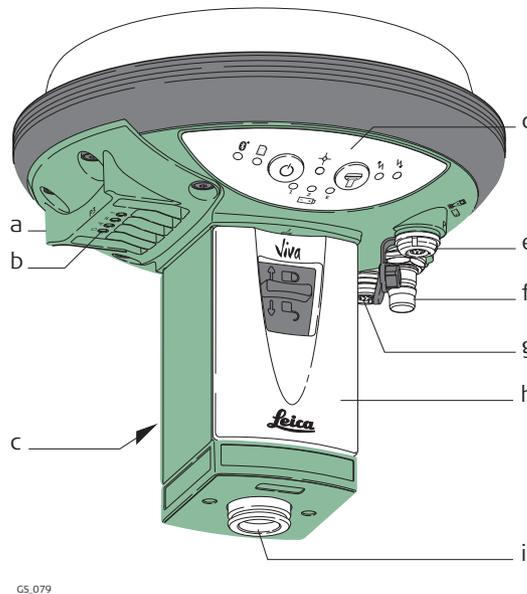

- a) RTK device compartment including port P3
- b) RTK device LEDs
- c) Battery compartment 2
- d) LEDs, ON/OFF button and Function button
- e) LEMO port P1 including USB port
- f) QN-connector for external UHF or digital cellular phone antenna
- g) LEMO port P2
- h) Battery compartment 1 with SD card slot
- i) Mechanical Reference Plane (MRP)




A Bluetooth port is included inside all GS GNSS instruments to enable connectivity to the CS10/CS15 field controller.

3 User Interface


3.1 Keyboard

Keyboard GS10

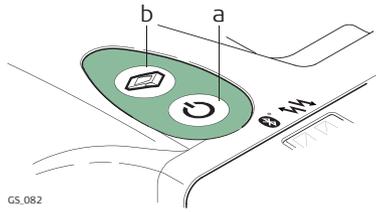

- a) ON/OFF button
- b) Function button

Keyboard GS15

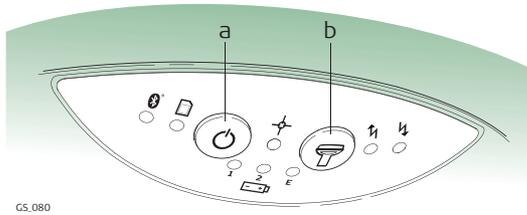

- a) ON/OFF button
- b) Function button

ON/OFF button

Button	Function
ON/OFF 	<p>If GS10/GS15 already off: Turns on GS10/GS15 when held for 2 s.</p> <p> While the GS10/GS15 is booting all three battery LEDs are lighted. Once the GS10/GS15 has started, the normal LED behaviour starts.</p> <p>If GS10/GS15 already on: Turns off GS10/GS15 when held for 2 s.</p> <p> All LEDs will shine red for 1 s-2 s and then are turned off.</p>

Function button

 All functions following described assume the GS10/GS15 is already on.

Button	Function
Function 	<p>Press and hold button for < 1 s.</p> <p>If the GS10/GS15 is in:</p> <ul style="list-style-type: none"> • base mode: The GS10/GS15 switches to be in rover mode. • rover mode and in static mode: The GS10/GS15 switches to be in base mode. • rover mode and in kinematic mode: The GS10/GS15 switches to be in base mode. <p>Press and hold button for 3 s.</p> <p>If the GS10/GS15 is in:</p> <ul style="list-style-type: none"> • base mode and a position is available: The RTK base LED flashes green for 2 s. The GS10/GS15 takes the next available position and updates the coordinates of the currently stored RTK base position. • base mode and no position is available: The RTK base LED flashes yellow for 2 s.

Button	Function
	<ul style="list-style-type: none"> • rover mode: No action.
	Press and hold button for 5 s. If the GS10/GS15 is in: <ul style="list-style-type: none"> • base mode: No action. • rover mode and configured for a dial-up or Ntrip connection: The RTK rover LED flashes green for 2 s. The GS10/GS15 will connect to the RTK base station or the Ntrip server configured.
	<ul style="list-style-type: none"> • rover mode and not configured for a dial-up or Ntrip connection: No action.

Button combinations

Button	Function
ON/OFF 	Press and hold buttons for 1 s.
Function 	The current almanacs stored on the GNSS instrument are deleted and new almanacs are downloaded. The Position LED flashes red quickly three times. Press and hold buttons for 5 s. The Memory LED flashes red quickly three times. The SD card of the GNSS instrument is formatted. The Memory LED continues to flash red as the SD card is formatted. Press and hold buttons for 10 s. The System RAM on the GNSS instrument is formatted. Settings of all installed software will be deleted. All LEDs (except Battery LED and Bluetooth LED) flash red quickly three times. After the formatting the System RAM, the GNSS instrument is turned off. Press and hold buttons for 15 s. The registry of the GNSS instrument is deleted. Windows CE and communication settings will be reset to factory defaults. All LEDs (except Battery LED and Bluetooth LED) flash red quickly three times. After deleting the registry, the GNSS instrument is turned off.

Operating the instrument

The GS10/GS15 GNSS instrument is operated either by the pressing its buttons (ON/OFF button, function button) or by the CS field controller.

Operation by buttons

The GS10/GS15 GNSS instrument is operated by pressing its buttons. Refer to "3.1 Keyboard" for a detailed description of the buttons and their function.

Operation by CS field controller

The GS10/GS15 GNSS instrument is operated by the CS field controller using the SmartWorx Viva software. Refer to the Leica CS10/CS15 User Manual or Leica Viva GNSS Getting Started Guide for a detailed description of the keys and their function.

Turn on GS10/GS15

To turn on the instrument press and hold the Power button for 2 s.

Turn off GS10/GS15

To turn off the instrument:

- press and hold the ON/OFF button for 2 s
 - confirm to power down the instrument when exiting SmartWorx Viva software on the CS10/CS15 field controller
-

4 Operation

4.1 Equipment Setup

4.1.1 Setting up as a Post-Processing Base

Use The equipment setup described is used for static operations over markers.

Description The instrument can be programmed with the CS field controller before use which can then be omitted from the setup.



- The antenna is mounted directly using screw fitting. If using stub and adapter, procedures can vary slightly.
- When using the adapter and carrier, ensure that the antenna and the adapter assembly slide down the full length of the carrier stub. An incorrectly mounted antenna will have a direct effect on the results.




If the instrument is left in the container during use in high temperatures, the lid should be left open. Refer to the User Manual for operating and storage temperatures.




Use an external battery such as GEB171 to ensure operation for a full day.

Equipment setup - GS10

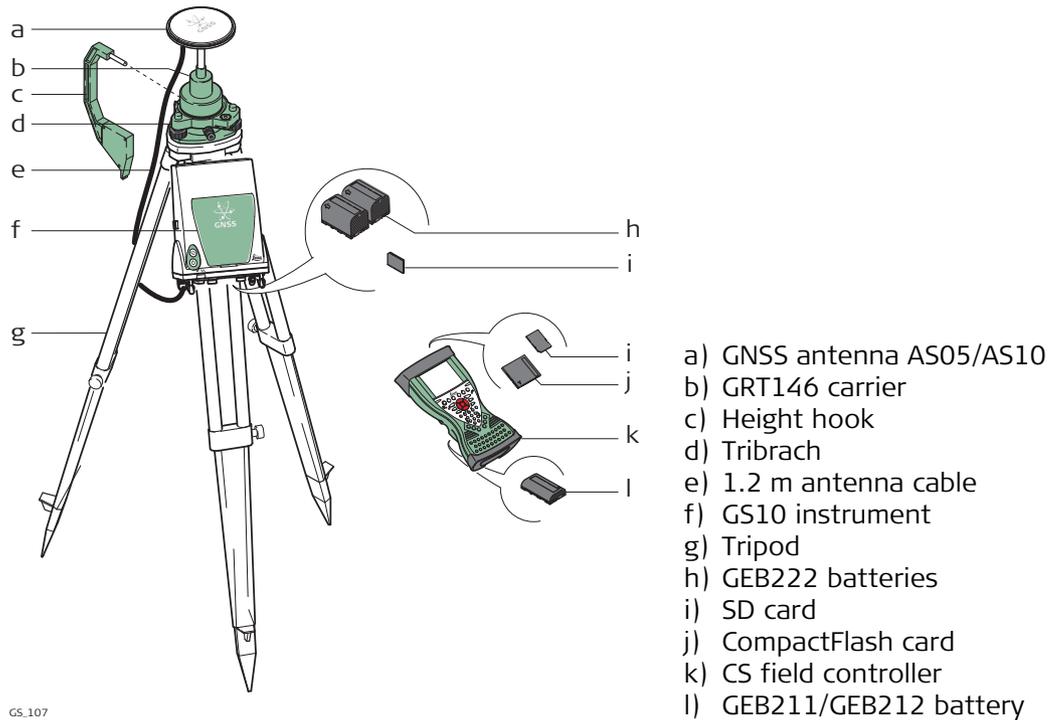

GS_107

Equipment setup - GS15

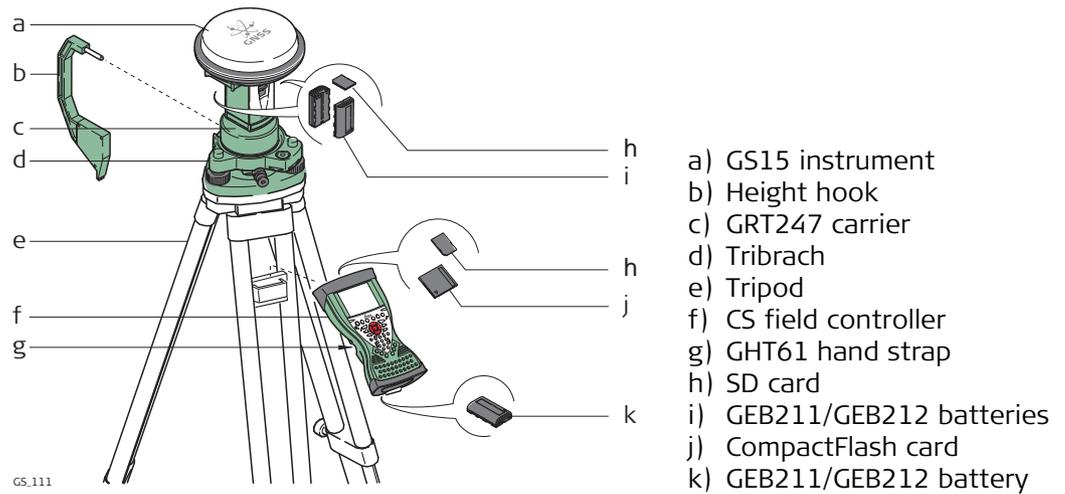

Equipment setup step-by-step

Step	Description	
1.	Set up the tripod.	
2.	Mount and level the tribrach on the tripod.	
3.	Ensure that the tribrach is over the marker.	
4.	Place and lock the carrier in the tribrach.	
5.	Screw the GNSS antenna onto the carrier.	GS10/GS25 GS08plus/GS12/GS14/GS15
6.	Check that the tribrach is still level.	Insert the data storage device (only GS14/GS15) and the batteries into the GS08plus/GS12/GS14/GS15. Screw the GS08plus/GS12/GS14/GS15 onto the carrier.
7.	Insert the batteries into the instrument.	Check that the tribrach is still level.
8.	Insert the SD card into the instrument.	Insert the data storage device and the battery into the CS field controller.
9.	Connect the instrument to the GNSS antenna using the antenna cable and port ANT on the instrument.	-
10.	Switch on the CS field controller and connect it to the instrument if necessary.  Mandatory for the GS08plus/GS12 and optional for the GS10/GS14/GS15/GS25.	
11.	To hang the instrument on the tripod leg, use the hook on the rear of the unit. Or place the instrument in the container.	To hang the CS field controller on the tripod leg, use the hook on the hand strap. Refer to the CS10/CS15 User Manual.
12.	Insert the height hook into the carrier.	
13.	Measure the antenna height using the height hook.	
14.	Press the ON/OFF button on the instrument for at least 2 s (GS25: 3 s) to switch on the instrument .	

Use

The equipment setup described is used for real-time base stations with the need of optimal radio coverage. Raw observation data can also be collected for post-processing.

Description

The GS10/GS25 instrument clips to the tripod leg. Connections are made to the GNSS and radio antenna. The radio antenna is mounted on the antenna arm which clips to the GNSS antenna. The GS10/GS12/GS14/GS15/GS25 instrument can be programmed with the CS field controller before use which can then be omitted from the setup. The GS10/GS25 instrument can be used as a DGPS base station, if fitted with the DGPS option, and as a real-time base station. The connection between GS14/GS15 and CS field controller is made via Bluetooth.




- The antenna is mounted directly using screw fitting. If using stub and adapter, procedures can vary slightly.
- When using the adapter and carrier, ensure that the antenna and the adapter assembly slide down the full length of the carrier stub. An incorrectly mounted antenna will have a direct effect on the results.
- Standard radio is used throughout the instructions. Digital cellular phones can also be used but the setup can differ slightly.



If the instrument is left in the container during use in high temperatures, the lid should be left open. Refer to the User Manual for operating and storage temperatures.



Use an external battery such as GEB171 to ensure operation for a full day.

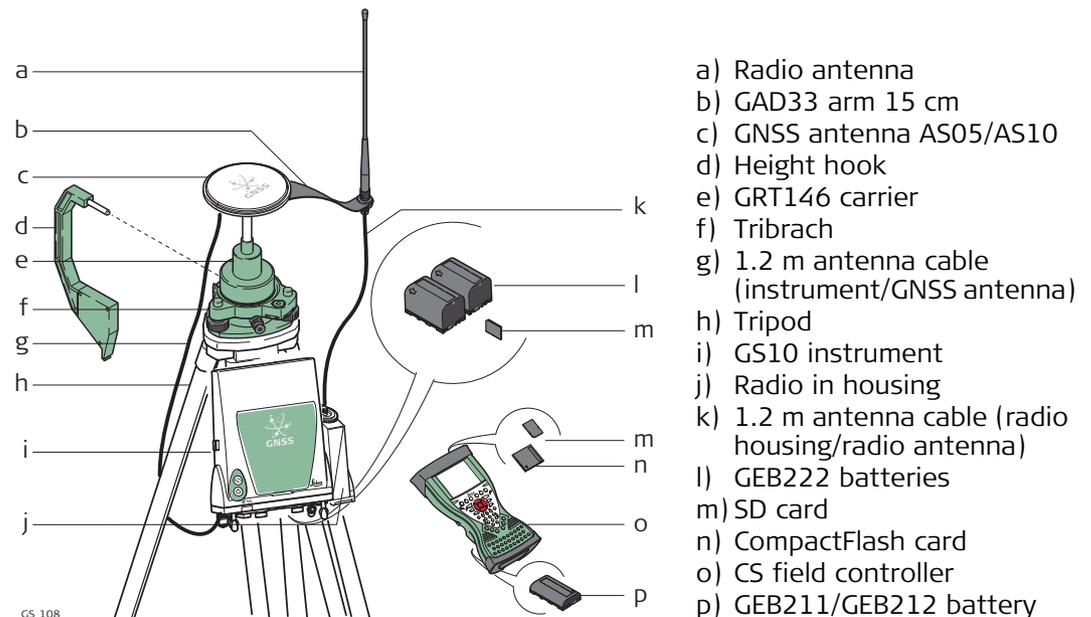Equipment setup - GS10

Step	Description		
9.	Connect the CS field controller to the instrument if necessary.	Connect the GEV205 cable to the GS08plus/GS12 or the GEV264 cable to the GS14, to the external battery and to the radio housing.	Insert the SD card or CompactFlash card and the battery into the CS field controller.
10.	To hang the instrument on the tripod leg, use the hook on the rear of the unit. Or place the instrument in the container.	Insert the SD card or CompactFlash card and the battery into the CS field controller.	Connect the CS field controller to the instrument if necessary.
11.	Insert the height hook into the carrier.	Connect the CS field controller to the instrument if necessary.	To hang the CS field controller on the tripod leg, use the hook on the hand strap. Refer to the CS10/CS15 User Manual.
12.	Measure the antenna height using the height hook.	To hang the CS field controller on the tripod leg, use the hook on the hand strap. Refer to the CS10/CS15 User Manual.	Insert the height hook into the carrier.
13.	Clip the antenna arm to the GNSS antenna.	Insert the height hook into the carrier.	Measure the antenna height using the height hook.
14.	Screw the radio antenna onto the antenna arm.	Measure the antenna height using the height hook.	Press the ON/OFF button on the instrument for at least 2 s to switch on the instrument.
15.	GS10 Attach the radio in its housing to port P2 or P3 on the instrument. GS25 Insert the slot-in radio into port P3 on the instrument.	Press the ON/OFF button on the instrument for at least 2 s to switch on the instrument.	-
16.	Connect the radio antenna to the radio using the second 1.2 m antenna cable.	-	-
17.	Press the ON/OFF button on the instrument for at least 2 s (GS25: 3 s) to switch on the instrument.	-	-

4.1.3

Setting up as a Real-Time Rover

Use

The equipment setup is used for real-time rover with extended periods of use in the field.

Description


The radio attaches to the instrument (GS10) or is inserted into the instrument (GS25) and is placed in the backpack. Connections are made to the GNSS antenna, radio antenna and CS field controller. The cables coming from the backpack can be disconnected when an obstacle such as a fence has to be crossed.

The CS field controller is fixed to the pole with the GHT62. Connection between the GS12/GS14/GS15/GS08plus instrument and the CS field controller is made through Bluetooth.




- The antenna is mounted directly using screw fitting. If using stub and adapter, procedures can vary slightly.
- When using the pole with stub, ensure that the antenna and the screw-to-stub adapter slide down the full length of the stub before tightening the locking ring. An incorrectly mounted antenna will have a direct effect on the results.
- Aluminium poles are used. They can be replaced with their carbon fibre equivalent without any change to these instructions.
- Standard radio is used throughout the instructions. Digital cellular phones can also be used but the setup can differ slightly.

Equipment setup - GS10

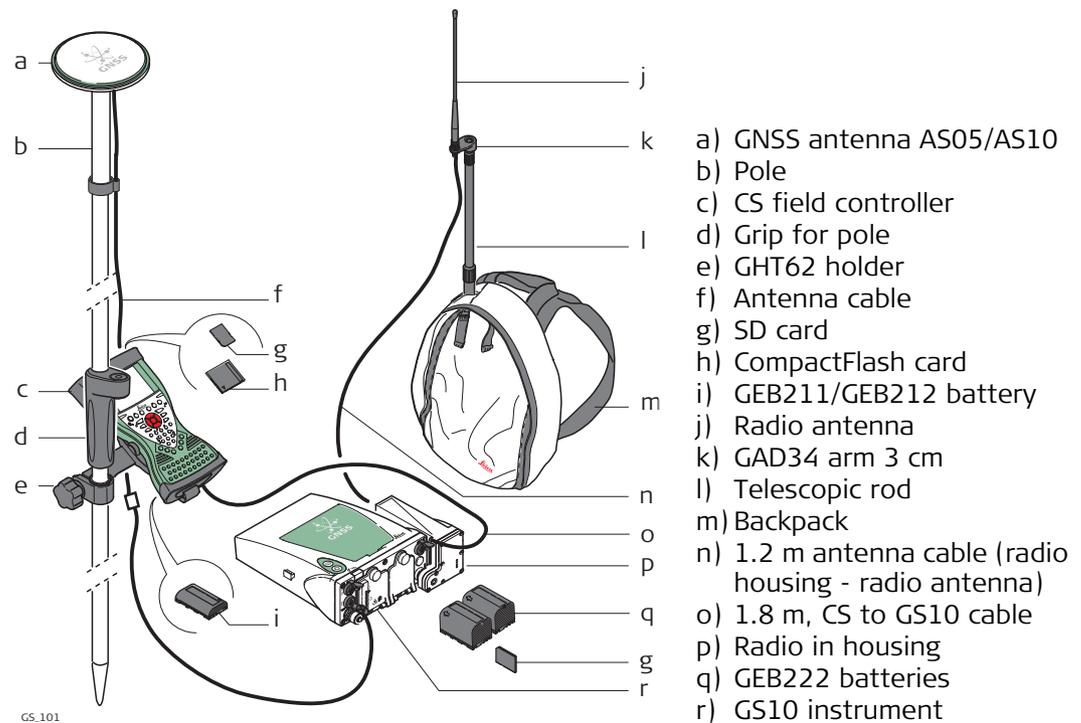

Equipment setup - GS15

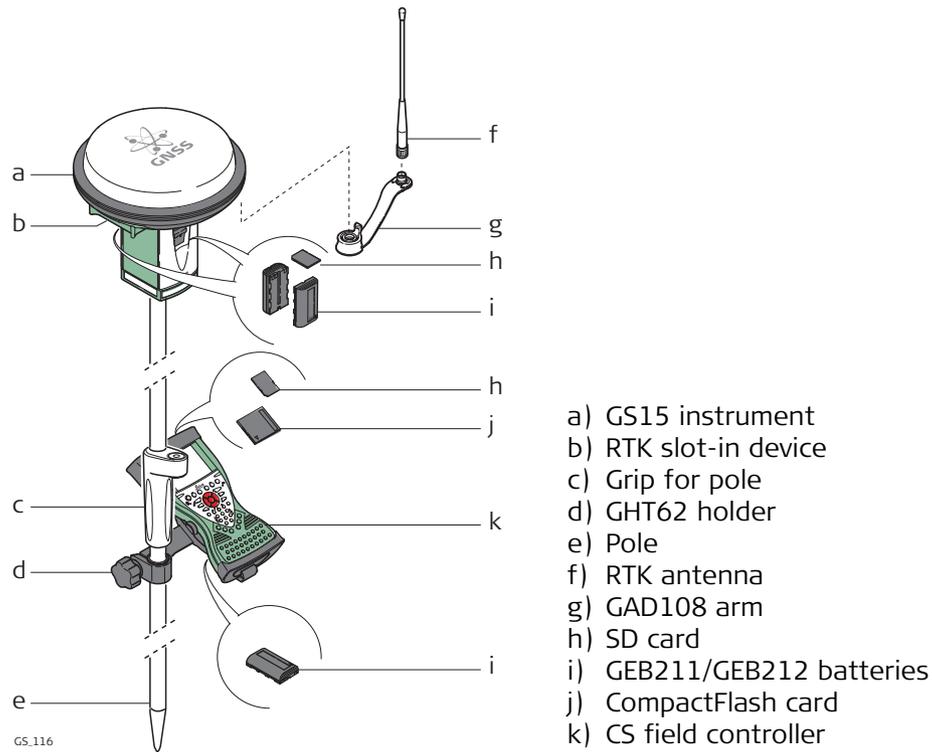


Equipment setup step-by-step

Step	Description
1.	Attach the GHT62 holder to the pole.
2.	Insert the SD card or CompactFlash card and the battery into the CS field controller.
3.	 For real-time setup with radio: Attach the CGR radio to the CS field controller. Refer to the CS10/CS15 User Manual.
4.	Clip the CS field controller into the holder and lock it by pushing the locking pin into the locked position.
5.	Press ON/OFF button on the CS field controller to switch on.
	Proceed with step 6. for GS10/GS25 and with step 25. for GS12/GS14/GS15/GS08plus.
6.	Screw the GNSS antenna to the top of the pole.
7.	Insert the SD card and the batteries into the instrument.
8.	GS10 Attach the radio in its housing to port P2 or P3 on the instrument. GS25 Insert the slot-in radio into port P3 on the instrument.
9.	Place the instrument in the backpack with the top side facing outwards and the instrument front panel to the top.
10.	Fasten the strap around the instrument.
11.	Push the telescopic rod through the slit in the top of the backpack. Ensure that it is located in the sleeve inside the backpack and push it all the way to the bottom.
12.	Adjust the height of the telescopic rod to suit.
13.	Screw the radio antenna arm onto the telescopic rod.
14.	Connect the first 1.2 m antenna cable to the radio antenna.

Step	Description
15.	Pass the cable through the opening in the top of the backpack and down underneath the instrument.
16.	Connect the first 1.2 m antenna cable to the radio.
17.	Connect the 1.6 m antenna cable to port ANT on the instrument.
18.	Pass the 1.6 m antenna cable through a cable brake and down through the opening in the bottom corner of the backpack flap.
19.	Draw the required amount of cable out of the backpack and tighten the cable brake.
20.	Connect one end of the second 1.2 m antenna cable to the loose end of the 1.6 m antenna cable and the other end to the GNSS antenna.
21.	Connect the 1.8 m, CS to GS cable to the CS field controller.
22.	Pass the 1.8 m, CS to GS cable through the opening in the bottom corner of the backpack flap and up through a cable brake.
23.	Plug it into port P1 on the instrument.
24.	Press ON/OFF button on the instrument to switch on. GS12/GS14/GS15/GS08plus.
25.	Insert the data storage device (only GS14/GS15) and the batteries into the GS12/GS14/GS15/GS08plus.
26.	Press ON/OFF button on the GS12/GS14/GS15/GS08plus to switch on.
27.	Screw the GS12/GS14/GS15/GS08plus to the top of the pole.
28.	CS field controller and GS12/GS14/GS15/GS08plus are connected via Bluetooth.

Position of cables in the backpack

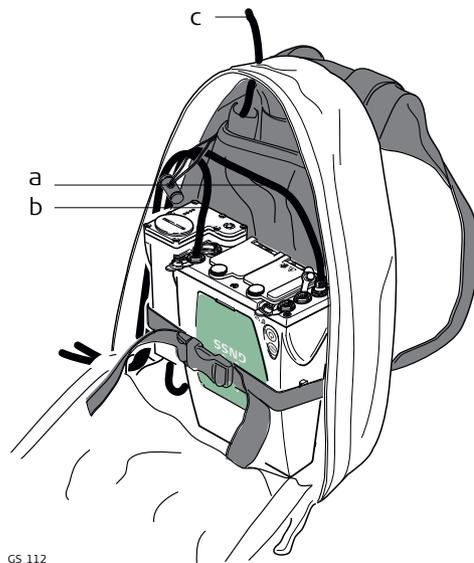

- a) 1.6 m antenna cable
- b) 1.8 m cable to connect CS field controller and GS instrument
- c) 1.2 m antenna cable to connect radio housing and radio antenna

GS_112

4.1.4


Using the Backpack

Use

The backpack is used for various applications. The applications are:

- Post-processed kinematic, pole and backpack.
 - Real-time rover, pole and backpack.
-


Antenna pole strap

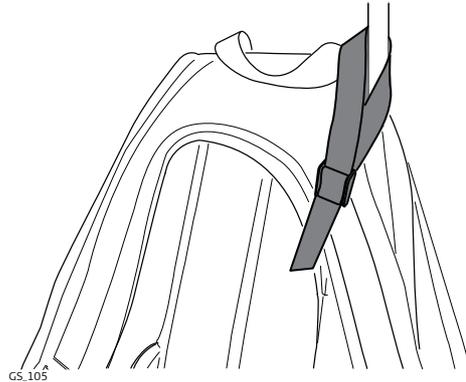

Ensures that the antenna pole does not sway around and remains as upright as possible.

Pass the strap around the pole and fasten using the clip as shown in the diagram.

Hip belt

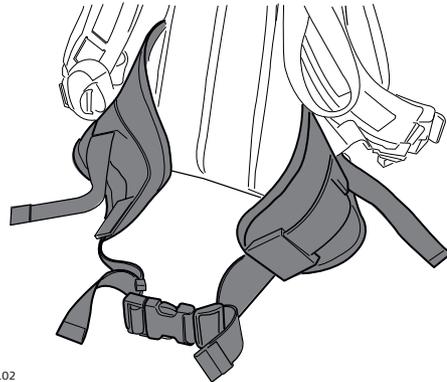

The hip belt

- transfers most of the weight from the shoulders to the hips when properly adjusted.
 - contains velcro attachments through which cables can be passed.
-

Internal net pouch



The internal net pouch is designed for

- carrying an AS05/AS10 antenna when not in use.
 - storing coiled cables.
 - carrying a non-standard radio.
 - carrying spare batteries.
 - carrying sandwiches.
-

Use in high temperatures

In high temperatures, it is desirable to increase air flow around the instrument. Therefore the backpack can be kept half or even fully open when in use.



GS.104

To half open the backpack:

- 1) Open the backpack halfway.
- 2) Tuck the flap inside.
- 3) Secure it with the velcro pad.



GS.106

To open the backpack completely:


- 1) Open the backpack completely.
- 2) Secure it with the velcro pad.
- 3) Tuck the flap under the instrument.

4.1.5

Fixing the CS to a Holder and Pole

Components of the GHT62 holder

The GHT62 holder consists of some components, as shown in the diagram.

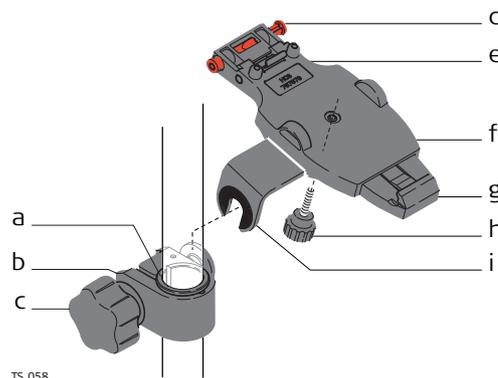

TS.058

GHT63 clamp




- a) Plastic sleeve
- b) Pole clamp
- c) Clamp bolt

GHT62 holder


- d) Locking pin
- e) Top clip
- f) Mounting plate (extendable)
- g) Bottom clip
- h) Tightening screw
- i) Mounting arm

Fixing the CS field controller and GHT62 to a pole step-by-step

Step	Description
	If you use the CS15 field controller, extend the mounting plate of the holder first.
	For an aluminium pole, fit the plastic sleeve to the pole clamp.
1.	Insert the pole into the clamp hole.
2.	Attach the holder to the clamp using the clamp bolt.
3.	Adjust the angle and the height of the holder on the pole to a comfortable position.
4.	Tighten the clamp with the clamp bolt.

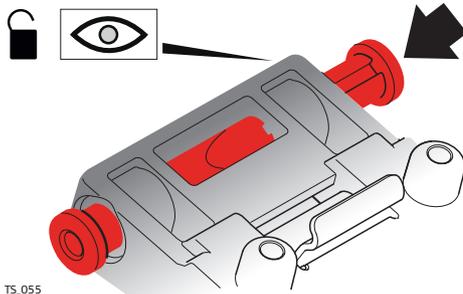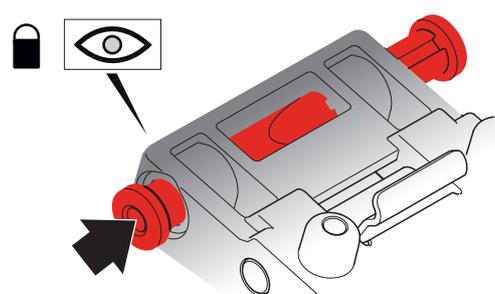Step	Description
5.	<p>Before the CS field controller is placed onto the mounting plate, ensure that the locking pin is put into the unlocked position. To unlock the locking pin, push the locking pin to the left.</p>  <p style="text-align: right; font-size: small;">TS_055</p>
6.	<p>Hold the CS field controller above the holder and lower the end of the CS field controller into the mounting plate.</p>
7.	<p>Apply slight pressure in a downward direction and then lower the top part of the CS field controller until the unit is clicked into the holder. The guides of the mounting plate aid in this action.</p>  <p style="text-align: right; font-size: small;">TS_056</p>
8.	<p>After the CS field controller is placed onto the mounting plate, ensure that the locking pin is put into the locked position. To lock the locking pin, push the locking pin to the right.</p>  <p style="text-align: right; font-size: small;">TS_054</p>

Detaching the CS from a pole step-by-step

Step	Description
1.	<p>Unlock the locking pin by pushing the locking pin to the left of the mounting plate.</p>
2.	<p>Place palm over the top of the CS until fingers grip the bar of the holder underneath.</p>
3.	<p>Push from the top of the CS toward the bar of the holder.</p>
4.	<p>While in this position, lift the top of the CS from the holder.</p>  <p style="text-align: right; font-size: small;">TS_057</p>




Microsoft ActiveSync (for PCs with Windows XP operating system) or Windows Mobile Device Center (for PCs with Windows Vista or Windows 7/Windows 8 operating system) is the synchronisation software for Windows mobile-based pocket PCs. Microsoft ActiveSync or Windows Mobile Device Center enables a PC and a Windows mobile-based pocket PC to communicate.

Install Leica Viva USB drivers

Step	Description
1.	Start the PC.
2.	Insert the Leica Viva Series USB card.
3.	Run the SetupViva&GR_USB_XX.exe to install the drivers necessary for Leica Viva devices. Depending on the version (32bit or 64bit) of the operating system on your PC, you have to select between the three setup files following: <ul style="list-style-type: none"> • SetupViva&GR_USB_32bit.exe • SetupViva&GR_USB_64bit.exe • SetupViva&GR_USB_64bit_itanium.exe The setup has to be run only once for all Leica Viva devices.
4.	The Welcome to InstallShield Wizard for Leica Viva & GR USB drivers window appears. Ensure that all Leica Viva devices are disconnected from your PC before you continue!
5.	Next> .
6.	The Ready to Install the Program window appears.
7.	Install. The drivers will be installed on your PC. For PCs with Windows Vista or Windows 7/Windows 8 operating system: If not already installed, Windows Mobile Device Center will be installed additionally.
8.	The InstallShield Wizard Completed window appears.
9.	Check I have read the instructions and click Finish to exit the wizard.


Connect USB cable to PC for the first time step-by-step

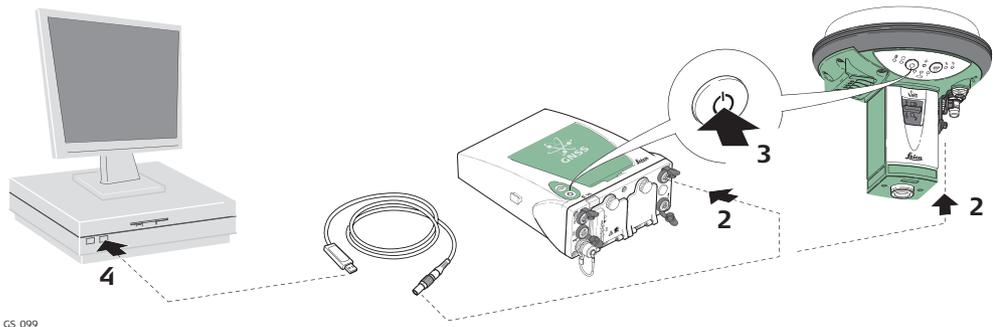

GS_099

Step	Description
1.	Start the PC.
2.	Plug the GEV234 cable into Port P1 of the instrument (GS10/GS15).
3.	Turn on the instrument.
4.	Plug the GEV234 cable into the USB port of the PC. The Found New Hardware Wizard starts up automatically.
5.	Check Yes, this time only. Next> .
6.	Check Install the software automatically (Recommended). Next> . The software for Remote NDIS based LGS GS Device will be installed on your PC.
7.	Finish.
8.	The Found New Hardware Wizard starts up automatically a second time.
9.	Check Yes, this time only. Next> .
10.	Check Install the software automatically (Recommended). Next> . The software for LGS GS USB Device will be installed on your PC.
11.	Finish.
	For PCs with Windows XP operating system:
12.	Run the ActiveSync installation program if not already installed.
13.	Allow USB connections inside the Connection Settings window of ActiveSync.
	For PCs with Windows Vista or Windows 7 operating system:
14.	Windows Mobile Device Center starts up automatically. If does not start automatically, start Windows Mobile Device Center.

Connect to PC via USB cable step-by-step

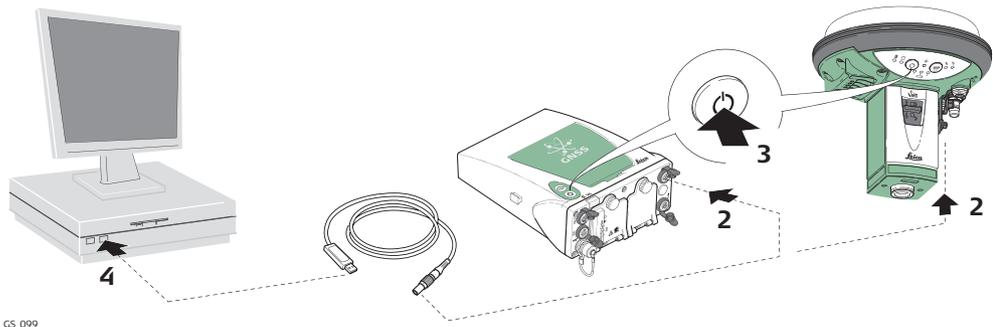

GS_099

Step	Description
1.	Start the PC.
2.	Plug the GEV234 cable into port P1 of the instrument (GS10/GS15).
3.	Turn on the instrument.
4.	Plug the GEV234 cable into the USB port of the PC.
	For PCs with Windows XP operating system:
	 ActiveSync starts up automatically. If does not start automatically, start ActiveSync. If not already installed, run the ActiveSync installation program.
5.	Allow USB connections inside the Connection Settings window of ActiveSync.
6.	Click Explore in ActiveSync.
	 The folders on the CS field controller are displayed under Mobile Devices . The folders of the data storage device can be found in StorageCard .
	For PCs with Windows Vista or Windows 7 operating system:
	 Windows Mobile Device Center starts up automatically. If does not start automatically, start Windows Mobile Device Center.

Description

The Web server is a web-based tool to view the status of and configure the GNSS instruments. The Web server application is integrated into the GS firmware and cannot be deleted.

Accessing the Web server via cable step-by-step

Step	Description
1.	Start the PC and turn on the GS GNSS instrument.  Instead of connecting to your PC, you can connect your GS GNSS instrument to the Leica CS field controller.
2.	Connect the GS GNSS instrument with the GEV234 cable to the PC. Refer to "4.1.6 Connecting to a Personal Computer".
3.	Double-Click the Configure GS connection shortcut from the desktop of your PC. The GS GNSS network adapter is configured with IP address: 192.168.254.1. A DOS window appears when the configuration was successful. Press any key to exit the DOS window. The Configure GS connection shortcut disappears from the desktop.
4.	Start the web browser of your PC.
5.	Type in http://192.168.254.2 and press enter to access the web server of GS instrument.

Accessing the Web server via Bluetooth step-by-step

To access the Web server the tasks following have to be done:

- Configure the PC's Bluetooth device
- Establish a Bluetooth connection between PC and GS
- Accessing the Web server

Configuring the PC's Bluetooth device

Step	Description
1.	Start your PC.
2.	Activate the Bluetooth device of your PC.
3.	Go Start ⇒ Settings ⇒ Network Connections .
4.	Double-click Bluetooth from the LAN or High-Speed Internet device list. The Bluetooth Properties windows is started.
5.	In the General page, select Internet Protocol (TCP/IP) from the list and click Properties . The Internet Protocol (TCP/IP) properties windows is started.
6.	Set IP address: 192.168.253.1 and Subnet mask: 255.255.255.0 and click OK confirm the settings.
	This procedure has to be done only once.

Establishing a Bluetooth connection between PC and GS GNSS instrument

Step	Description
1.	Start the PC and turn on the GS GNSS instrument.  Instead of connecting to your PC, you can connect your GS GNSS instrument to the Leica CS field controller. In this case, turn on the Leica CS field controller, start SmartWorx Viva and establish a Bluetooth connection to the GS GNSS instrument.
2.	Run the Bluetooth software and start the Bluetooth Setup Wizard .
3.	Click Next . The Bluetooth Device Selection will be started and an automatic search will be done.

Step	Description
4.	Select the shown GS GNSS instrument and click Next . The Bluetooth Security Setup is started.
5.	Type in 0000 as Bluetooth security code and click Pair Now . The pairing procedure will be done and the Bluetooth Service Selection is started.
6.	Highlight Personal Ad-hoc Network and check the checkbox for Personal Ad-hoc Network.  Do not select Serial Port as service.
7.	Click Next . The Bluetooth Setup Wizard Completion Page is started.
8.	Type in a name for your GS GNSS instrument and click Finish to complete the Bluetooth Setup Wizard .
	This procedure has to be repeated for every GS GNSS instrument you want to connect to.

Accessing the Web server

Step	Description
1.	Start the web browser on your PC/CS field controller.  Ensure that your GS GNSS instrument is still running and the Bluetooth connection between PC /CS field controller and GS is established.
2.	Type in 192.168.253.2 . The Web server is started. You will see the home functions following: <ul style="list-style-type: none"> • Go to Work! <ul style="list-style-type: none"> - To select and start the Wake-up application. • Current Status <ul style="list-style-type: none"> - To access GNSS information of the GS as well as the instrument firmware. • Instrument <ul style="list-style-type: none"> - To access configuration settings for the GS. • User <ul style="list-style-type: none"> - To upload and activate firmware, licence keys and languages.

4.1.8

Configuring the Instrument

Description

The instrument can be set up as real-time rover or as real-time base by pressing the function button.



Turn on the instrument before pressing the function button. Refer to "Turn on GS10/GS15".

Switching to a real-time rover

Function button	IF the	is	THEN
Press and hold button for < 1 s	GS	in base mode	The GS GNSS instrument switches to be in rover mode.

Switching to a real-time base

Function button	IF the	is	THEN
Pressing for < 1 s	GS	in rover mode and in static mode	The GS GNSS instrument switches to be in base mode and takes the most recent computed position (the average of all static positions).
		in rover mode and in kinematic mode	The GS GNSS instrument switches to be in base mode.

Updating RTK base position

Function button	IF the	is	THEN
Press and hold button for 3 s	GS	in base mode and a position is available	The RTK base LED flashes green for 2 s. The GS GNSS instrument takes the next available position and updates the coordinates of the currently stored RTK base position.
		in base mode and no position is available	The RTK base LED flashes yellow for 2 s.
		in rover mode	No action. The GS has to be switched to base mode first. Refer to "Switching to a real-time base".

4.2

Batteries

4.2.1

Operating Principles

First-time use / Charging batteries

- The battery must be charged prior to using it for the first time.
- The permissible temperature range for charging is between 0°C to +40°C/ +32°F to +104°F. For optimal charging, we recommend charging the batteries at a low ambient temperature of +10°C to +20°C/+50°F to +68°F if possible.
- It is normal for the battery to become warm during charging. Using the chargers recommended by Leica Geosystems, it is not possible to charge the battery if the temperature is too high.
- For Li-Ion batteries, a single refreshing cycle is sufficient. We recommend carrying out a refreshing cycle when the battery capacity indicated on the charger or on a Leica Geosystems product deviates significantly from the actual battery capacity available.


Operation / Discharging

- The batteries can be operated from -20°C to +55°C/-4°F to +131°F.
- Low operating temperatures reduce the capacity that can be drawn; high operating temperatures reduce the service life of the battery.

4.2.2

Battery for GS10

Change battery step-by-step

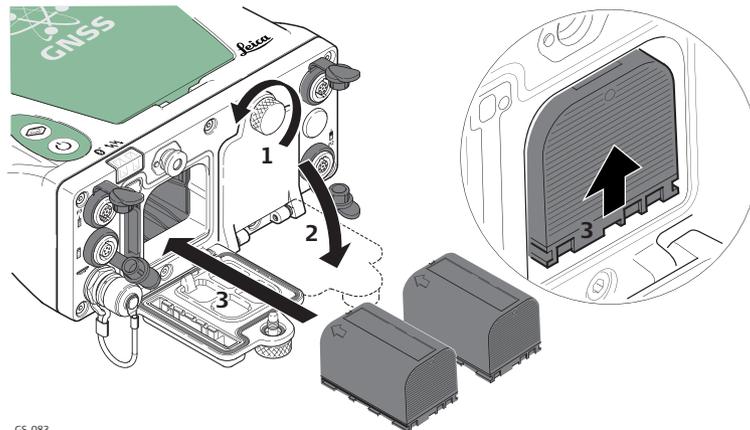

GS_083

Step	Description
	The batteries are inserted in the front of the instrument.
1.	Loosen the screw of one of the battery compartments.
2.	Open the cover of the battery compartment.
3.	With the Leica logo facing upwards, slide the battery into the battery compartment and push upwards so that it locks into position.
4.	Close the cover of the battery compartment and tighten the screw.
5.	Repeat steps 1. to 4. for the second battery compartment.
6.	To remove a battery, loosen the screw to open the cover of the battery compartment.
7.	Push the battery slightly in and at the same time downwards. This releases the battery from its fixed position.
8.	Pull out the battery.
9.	Close the cover of the battery compartment and tighten the screw.
10.	Repeat steps 6. to 9. for the second battery compartment.

4.2.3

Battery for GS15

Change battery step-by-step (GS15)



Step	Description
	The batteries are inserted in the bottom part of the instrument.
1.	Push the slide fastener of one of the battery compartments in the direction of the arrow with the open-lock symbol.
2.	Remove the cover from the battery compartment.
3.	With the battery contacts facing upwards, slide the battery into the cover of the battery compartment.
4.	Push the battery upwards so that it locks into position.
5.	Insert the cover of the battery compartment into the compartment.
6.	Push the slide fastener in the direction of the arrow with the close-lock symbol.

4.3

Working with the Memory Device




- Keep the card dry.
- Use it only within the specified temperature range.
- Do not bend the card.
- Protect the card from direct impacts.



Failure to follow these instructions could result in data loss and/or permanent damage to the card.


**Insert and remove
an SD card into
GS10 step-by-step**

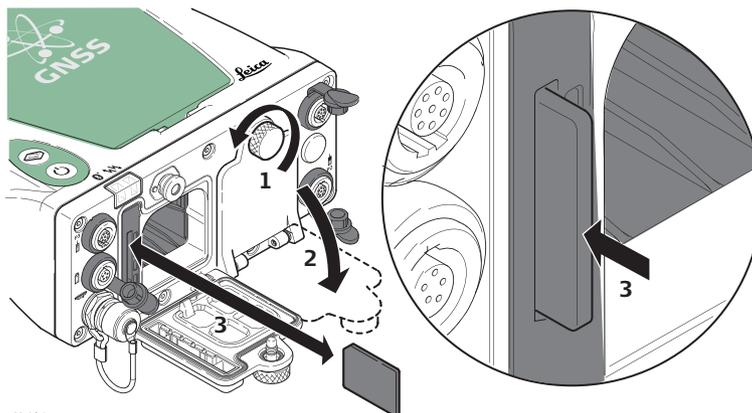

GS_084

Step	Description
	The SD card is inserted into a slot inside the battery compartment A of the instrument.
1.	Open the cover of battery compartment A. Refer to "4.2.2 Battery for GS10" for further information.
2.	Insert the card firmly into the slot until it clicks into position.
3.	Close the cover of battery compartment A and tighten the screw.
4.	To remove the card, open the cover of battery compartment A.
5.	Gently press on the top of the card to release it from the slot.
6.	Remove the SD card.
7.	Close the cover of battery compartment A and tighten the screw.

Insert and remove an SD card into GS15 step-by-step

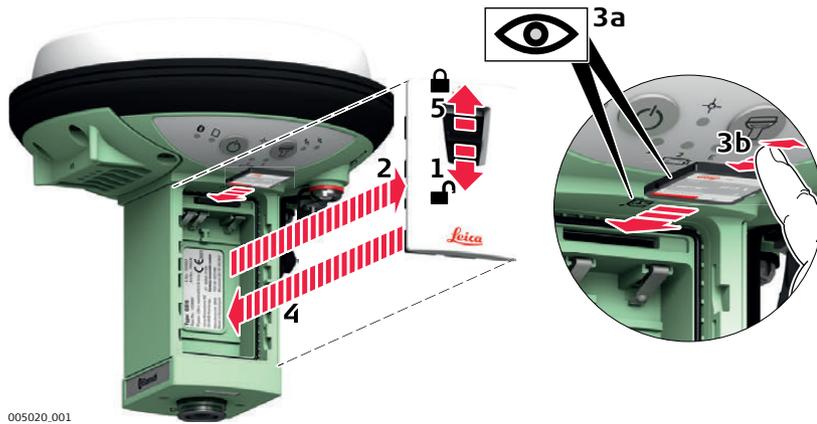

005020_001

Step	Description
	The SD card is inserted into a slot inside the battery compartment 1 of the instrument.
1.	Push the slide fastener of battery compartment 1 in the direction of the arrow with the open-lock symbol.
2.	Remove the cover from battery compartment 1.
3.	Slide the card firmly into the slot until it clicks into position.
	Do not force the card into the slot. The card should be held with the contacts upwards and facing the slot.
	To remove the card, push the slide fastener of battery compartment 1 in the direction of the arrow with the open-lock symbol and remove the cover. Gently press on the top of the card to release it from the slot. Remove the SD card.
4.	Insert the cover into battery compartment 1.
5.	Push the slide fastener in the direction of the arrow with the close-lock symbol.

4.4

Working with the RTK Device

4.4.1

GS10

Devices fitting into a clip-on-housing


Digital cellular phones fitting into a clip-on-housing

Digital cellular phone	Clip-on-housing
Siemens MC75	GFU24
CDMA MultiTech MTMMC-C (US)	GFU19
CDMA MultiTech MTMMC-C (CAN)	GFU25
Telit UC864-G	GFU28
Cinterion PXS8	GFU29

Radios fitting into a clip-on-housing


Radio	Clip-on-housing
Pacific Crest PDL, receive	GFU15
Satellite 3AS, transceiver	GFU14
Satellite M3-TR1, transceiver	GFU27

Attach and detach a clip-on-housing step-by-step

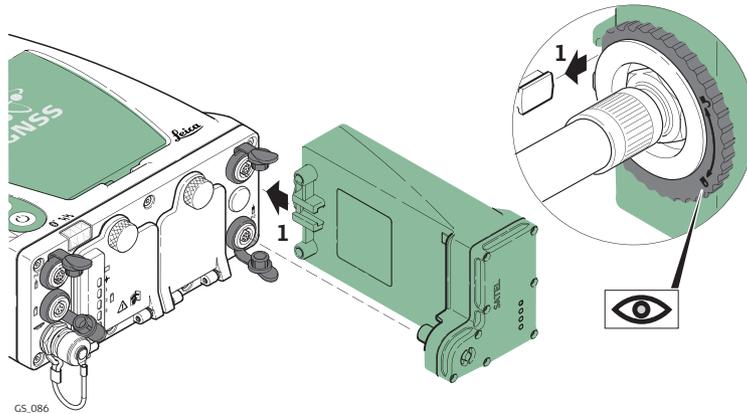

Step	Description
	The clip-on-housing for devices fits on either of the small sides of the instrument.
1.	Place the clip-on-housing into position such that the guide rails for the clip-on-housing on the instrument and the guide rails on the clip-on-housing are aligned.
2.	Ensure that the connector on the clip-on-housing fits to port P2 or port P3 on the instrument front panel.
3.	Slide the clip-on-housing toward the instrument front panel until the connector is plugged into port P2 or port P3.
4.	On the top side of the clip-on-housing, turn the screw clockwise, as shown by the symbols on the screw, to lock the clip-on-housing to the instrument.
5.	To detach the clip-on-housing, turn the screw anticlockwise on the top side of the clip-on-housing, as shown by the symbols on the screw, to unlock the clip-on-housing from the instrument.
6.	Slide the clip-on-housing away from the instrument front panel until the connector is unplugged from port P2 or port P3.

Insert and remove a SIM card step-by-step

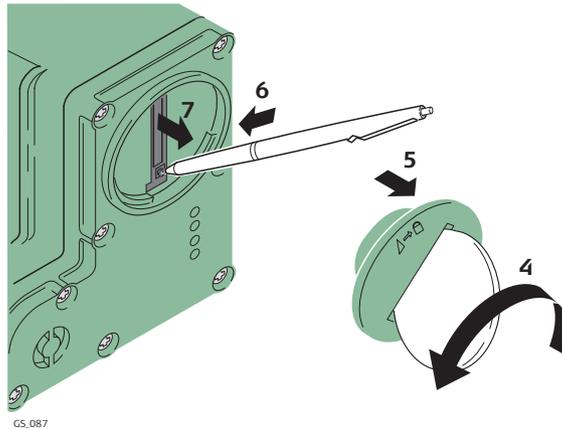

GS_087


Step	Description
	The SIM card is inserted into a slot on the bottom of the clip-on-housing.
1.	Take the SIM card, a coin and a pen.
2.	Locate the SIM card screw, that covers the SIM card slot, on the bottom of the clip-on-housing.
3.	Insert the coin into the groove of the SIM card screw.
4.	Turn the coin anticlockwise to loosen the SIM card screw.
5.	Remove the SIM card screw from the housing.
6.	Using the pen, press the small button of the SIM card slot to eject the SIM card holder.
7.	Take the SIM card holder out off the housing.
8.	Place the SIM card into the SIM card holder, the chip facing up.
9.	Insert the SIM card holder into the SIM card slot, the chip facing the connectors inside the slot.
10.	Place the SIM card screw back on the housing.
11.	Insert the coin into the groove of the SIM card screw.
12.	Turn the coin clockwise to tighten the SIM card screw.

LED indicators

Description

Each clip-on-housing for a radio or digital cellular phones has **Light Emitting Diode** indicators on the bottom side. They indicate the basic device status.

Diagram

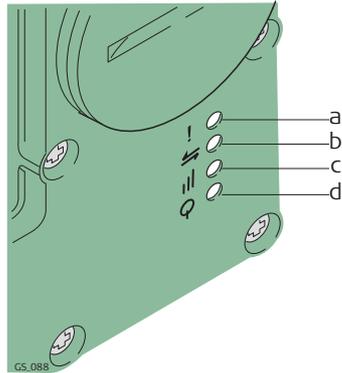

- a) Mode LED, available for Satelline 3AS
- b) Data transfer LED
- c) Signal strength LED
- d) Power LED

Description of the LEDs

IF the	on	is	THEN
Mode LED	GFU14 with Satelline 3AS, GFU27 with Satelline M3-TR1	red	the device is in the programming mode controlled from the PC via cable.
Data transfer LED	any device	off	data is not being transferred.
		green or flashing green	data is being transferred.
Signal strength LED	GFU19 (US), GFU25 (CAN) with CDMA Multi-Tech MTMMC-C	red	device is on, not registered on the network.
		flashing red	device is on, registered on the network.
		off	download mode or device is off.
	GFU24 with Siemens MC75, GFU28 with Telit UC864-G	red	call is in progress.
		red: long flash, long break	no SIM card inserted, no PIN entered or network search, user authentication or network login in progress.
		red: short flash, long break	logged on to network, no call in progress.
		red: flashing red, long break	GPRS PDP context activated.
		red: long flash, short break	Packet switched data transfer is in progress.
off	device is off.		

IF the	on	is	THEN
	GFU29 with Cinterion PXS8	off	LED has not been activated by the GS10/GS15.
		500 ms on and 500 ms off	network searching or limited GSM/UMTS service due to missing SIM or PIN.
		Flashing every 4 s	registered to network, but no data transfer in progress.
		Flashing every 2 s	packet service data transfer in progress.
		Flashing every 1 s	circuit switched data transfer in progress (GSM/UMTS only).
	GFU15 with Pacific Crest PDL	red or flashing red	the communication link, Data Carrier Detection , is okay on the roving instrument.
		off	the DCD is not okay.
	GFU14 with Sateline 3AS, GFU27 with Sateline M3-TR1	red or flashing red	the communication link, Data Carrier Detection , is okay on the roving instrument.
		off	the DCD is not okay.
Power LED	GFU29 with Cinterion PXS8	off	power is completely off OR GSM module is shut down. 10 s power down are required to restart.
		green	power is on AND GSM module is ready.
	any other device	off	power is off.
		green	power is okay.

Devices fitting into the GS15 GNSS instrument


Digital cellular phones fitting into the GS15 GNSS instrument

Digital cellular phone	Device
Telit UC864-G	SLG1
CINTERION MC75i	SLG2
CDMA Telit CC864-DUAL (US)	SLC1, SLC2

Radios fitting into the GS15 GNSS instrument

Radio	Device
Pacific Crest PDL, transceive	SLR3-1
Pacific Crest PDL, transceive	SLR3-2
Satellite 3AS, transmit	SLR1
Satellite 3AS, receive	SLR2
Satellite M3-TR1, transceive	SLR5


Insert and remove a slot-in-device step-by-step

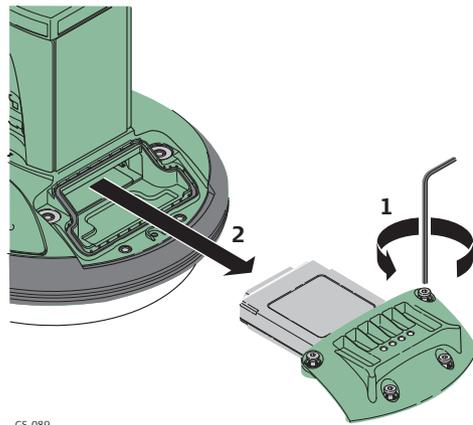

GS_089

Step	Description
	Turn over the GS15 to gain access to the slot-in-device compartment.
1.	Loosen the screws of the compartment cover with the supplied Allen key.
2.	Remove the compartment cover.
3.	Attach the slot-in-device to the compartment cover.
4.	Insert the compartment cover into the compartment (port P3).
5.	Tighten the screws. All screws have to be tightened to ensure that the instrument is waterproof.
	For the equipment setup as real-time base station with radio, it's recommended to use an external radio antenna mounted on a second tripod. This increases the height of the radio antenna and therefore maximises radio coverage. Refer to the Leica Viva GNSS Getting Started Guide for detailed information about the setup.

Insert and remove a SIM card step-by-step

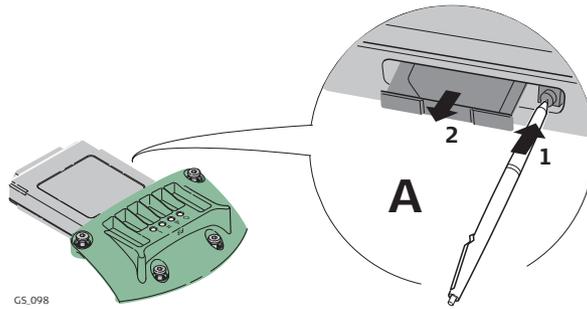

GS_098


Step	Description
	The SIM card is inserted into a slot on the side of the SLG1/SLG2.
	Take the SIM card and a pen.
1.	Using the pen, press the small button of the SIM card slot to eject the SIM card holder.
2.	Take the SIM card holder out off the SLG1/SLG2.
3.	Place the SIM card into the SIM card holder, the chip facing up.
4.	Insert the SIM card holder into the SIM card slot, the chip facing the connectors inside the slot.

LED indicators

Description

Each slot-in-device for a radio or digital cellular phones has **Light Emitting Diode** indicators on the bottom side. They indicate the basic device status.

Diagram



GS_097

- a) Mode LED, available for Sateline 3AS
- b) Data transfer LED
- c) Signal strength LED
- d) Power LED

Description of the LEDs

IF the	on	is	THEN
Mode LED	SLR1, SLR2 with Sateline 3AS, SLR5 with Sateline M3-TR1	red	the device is in the programming mode controlled from the PC via cable.
Data transfer LED	any device	off	data is not being transferred.
		flashing green	data is being transferred.
Signal strength LED	SLC1 (US), SLC2 (US) with CDMA Telit CC864-DUAL	red	device is on, not registered on the network.
		flashing red	device is on, registered on the network.
		off	download mode or device is off.

IF the	on	is	THEN	
	SLG1 with Telit UC864-G, SLG2 with CINTERION MC75i	red	call is in progress.	
		red: long flash, long break	no SIM card inserted, no PIN entered or network search, user authentication or network login in progress.	
		red: short flash, long break	logged on to network, no call in progress.	
		red: flashing red, long break	GPRS PDP context activated.	
		red: long flash, short break	Packet switched data transfer is in progress.	
		off	device is off.	
	SLR3-1, SLR3-2 with Pacific Crest ADL	red	the communication link, Data Carrier Detection , is okay on the roving instrument.	
		flashing red	the communication link, Data Carrier Detection , is okay on the roving instrument, but signal is weak.	
		off	the DCD is not okay.	
	SLR1, SLR2 with Sateline 3AS, SLR5 with Sateline M3-TR1	red	the communication link, Data Carrier Detection , is okay on the roving instrument.	
		flashing red	the communication link, Data Carrier Detection , is okay on the roving instrument, but signal is weak.	
		off	the DCD is not okay.	
	Power LED	any device	off	power is off.
			green	power is okay.


LED indicators

Description


The GS10/GS15 GNSS instrument has Light Emitting Diode indicators. They indicate the basic instrument status.

Diagram

GS10



GS15



- a) Bluetooth LED
- b) Storage LED
- c) Position LED
- d) Power LEDs
- e) RTK Base LED
- f) RTK Rover LED

Description of the LEDs

IF the	is	THEN
Bluetooth LED	green	Bluetooth is in data mode and ready for connecting.
	purple	Bluetooth is connecting.
	blue	Bluetooth has connected.
Storage LED	off	no SD card is inserted or GS10/GS15 is switched off.
	green	SD card is inserted but no raw data is being logged.
	flashing green	raw data is being logged.
	flashing yellow	raw data is being logged but only 10% memory left.
	flashing red	raw data is being logged but only 5% memory left.
	red	SD card is full, no raw data is being logged.
	fast flashing red	no SD card is inserted but GS10/GS15 is configured to log raw data.
Position LED	off	no satellites are tracked or GS10/GS15 is switched off.
	flashing yellow	less than four satellites are tracked, a position is not yet available.
	yellow	a navigated position is available.
	flashing green	a code-only position is available.
	green	a fixed RTK position is available.
Power LED (active battery ^{*1})	off	battery is not connected, flat or GS10/GS15 is switched off.
	green	power is 40% - 100%.

IF the	is	THEN
	yellow	power is 20% - 40%. The remaining time for which enough power is available depends on the type of survey, the temperature and the age of the battery.
	red	power is 5% - 20%.
	fast flashing red	power is low (< 5%).
Power LED (passive battery ^{*2})	off	battery is not connected, flat or the GS10/GS15 is switched off.
	flashing green	power is 40% - 100%. LED is green for 1 s every 10 s.
	flashing yellow	power is 20% - 40%. LED is yellow for 1 s every 10 s.
	flashing red	power is less than 20%. LED is red for 1 s every 10 s.
RTK Rover LED	off	GS10/GS15 is in RTK base mode or GS10/GS15 is switched off.
	green	GS10/GS15 is in rover mode. No RTK data is being received at the interface of the communication device.
	flashing green	GS10/GS15 is in rover mode. RTK data is being received at the interface of the communication device.
RTK Base LED	off	GS10/GS15 is in RTK rover mode or GS10/GS15 is switched off.
	green	GS10/GS15 is in RTK base mode. No RTK data is being passed to the RX/TX interface of the communication device.
	flashing green	GS10/GS15 is in RTK base mode. Data is being passed to the RX/TX interface of the communication device.

*1 The battery, which currently powers the GS10/GS15 GNSS instrument.

*2 Other batteries, which are inserted or connected but are not currently power the GS10/GS15 GNSS instrument.

4.6

Guidelines for Correct Results with GNSS Surveys

Undisturbed satellite signal reception

Successful GNSS surveys require undisturbed satellite signal reception, especially at the instrument which serves as a base. Set up the instrument in locations which are free of obstructions such as trees, buildings or mountains.

Steady instrument for static surveys

For static surveys, the instrument must be kept perfectly steady throughout the whole occupation of a point. Place the instrument on a tripod or pillar.

Centred and levelled instrument

Centre and level the instrument precisely over the marker.

5 Care and Transport

5.1 Transport

Transport in the field When transporting the equipment in the field, always make sure that you

- either carry the product in its original transport container,
- or carry the tripod with its legs splayed across your shoulder, keeping the attached product upright.

Transport in a road vehicle Never carry the product loose in a road vehicle, as it can be affected by shock and vibration. Always carry the product in its transport container, original packaging or equivalent and secure it.

Shipping When transporting the product by rail, air or sea, always use the complete original Leica Geosystems packaging, transport container and cardboard box, or its equivalent, to protect against shock and vibration.

Shipping, transport of batteries When transporting or shipping batteries, the person in charge of the product must ensure that the applicable national and international rules and regulations are observed. Before transportation or shipping, contact your local passenger or freight transport company.

5.2 Storage

Product Respect the temperature limits when storing the equipment, particularly in summer if the equipment is inside a vehicle. Refer to "Technical Data" for information about temperature limits.

Li-Ion batteries

- Refer to "Technical Data" for information about storage temperature range.
- Remove batteries from the product and the charger before storing.
- After storage recharge batteries before using.
- Protect batteries from damp and wetness. Wet or damp batteries must be dried before storing or use.
- A storage temperature range of 0°C to +30°C / +32°F to +86°F in a dry environment is recommended to minimize self-discharging of the battery.
- At the recommended storage temperature range, batteries containing a 40% to 50% charge can be stored for up to one year. After this storage period the batteries must be recharged.

5.3


Cleaning and Drying

Product and accessories

- Use only a clean, soft, lint-free cloth for cleaning. If necessary, moisten the cloth with water or pure alcohol. Do not use other liquids; these may attack the polymer components.
-

Damp products

Dry the product, the transport container, the foam inserts and the accessories at a temperature not greater than 40°C/104°F and clean them. Remove the battery cover and dry the battery compartment. Do not repack until everything is dry. Always close the transport container when using in the field.

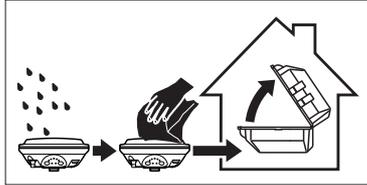

Cables and plugs

Keep plugs clean and dry. Blow away any dirt lodged in the plugs of the connecting cables.

Connectors with dust caps

Wet connectors must be dry before attaching the dust cap.

6

Technical Data

6.1

GS10/GS15 Technical Data

6.1.1

Tracking Characteristics

Instrument technology

SmartTrack

Satellite reception

Triple frequency

Instrument channels



Depending on the satellite systems and signals configured, a maximum number of 120 channels is allocated.

Supported codes and phases

GPS

Type	L1	L2	L5
GS10/GS15	Carrier phase, C/A-code	Carrier phase, C code (L2C) and P2-code	Carrier phase, code

GLONASS

Type	L1	L2
GS10/GS15	Carrier phase, C/A-code	Carrier phase, P2-code

Galileo

Type	E1	E5a	E5b	Alt-BOC
GS10/GS15	Carrier phase, code	Carrier phase, code	Carrier phase, code	Carrier phase, code

BeiDou

Type	B1	B2
GS10/GS15	Carrier phase, code	Carrier phase, code



Carrier phase and code measurements on L1, L2 and L5 (GPS) are fully independent with AS on or off.

Satellites tracked

Up to 60 satellites simultaneously on two frequencies



Accuracy is dependent upon various factors including the number of satellites tracked, constellation geometry, observation time, ephemeris accuracy, ionospheric disturbance, multipath and resolved ambiguities.

The following accuracies, given as **root mean square**, are based on measurements processed using LGO and on real-time measurements.

The use of multiple GNSS systems can increase accuracy by up to 30% relative to GPS only.

Differential code

The baseline precision of a differential code solution for static and kinematic surveys is 25 cm.

Differential phase in post-processing

Type	Horizontal	Vertical
Static and rapid static	3 mm + 0.5 ppm	5 mm + 0.5 ppm
Kinematic	8 mm + 1 ppm	15 mm + 1 ppm
Static with long observations	3 mm + 0.1 ppm	3.5 mm + 0.4 ppm

Differential phase in real-time

Type	Horizontal	Vertical
Single Baseline (< 30 km)	8 mm + 1 ppm	15 mm + 1 ppm
Network RTK	8 mm + 0.5 ppm	15 mm + 0.5 ppm

6.1.3

Technical Data

Dimensions

The dimensions are given for the housing without the sockets.

Type	Length [m]	Width [m]	Thickness [m]
GS10	0.212	0.166	0.079

Type	Height [m]	Diameter [m]
GS15	0.198	0.196

Weight

Instrument weights without battery and radio:

Type	Weight [kg]/[lbs]
GS10	1.20/2.65
GS15	1.34/2.95

Recording

Data (Leica GNSS raw data and RINEX data) can be recorded on the SD card.

Type	Capacity [MB]	Data capacity
SD card	<ul style="list-style-type: none">1024	1024 MB is typically sufficient for about GPS only (12 satellites) <ul style="list-style-type: none">8000 h L1 + L2 + L5 data logging at 15 s rate32000 h L1 + L2 + L5 data logging at 60 s rate1440000 real-time points with codes GPS + GLONASS (12/8 satellites) <ul style="list-style-type: none">6800 h data logging at 15 s rate27200 h data logging at 60 s rate1440000 real-time points with codes GPS + GLONASS + Galileo (12/8/10 satellites) <ul style="list-style-type: none">3200 h data logging at 15 s rate12800 h data logging at 60 s rate1440000 real-time points with codes

Power

Power consumption: GS10/GS15, radio excluded: 3.2 W typically, 270 mA
External supply voltage: Nominal 12 V DC (==, GEV71 car battery cable to a 12 V car battery), voltage range 10.5 V-28 V DC

Internal battery

Type: Li-Ion
Voltage: 7.4 V
Capacity: GEB211: 2.2 Ah
GEB212: 2.6 Ah
GEB221: 4.4 Ah
GEB222: 6.0 Ah

Battery external

Type: NiMH
Voltage: 12 V
Capacity: GEB171: 9.0 Ah

Operating times

The given operating times are valid for

- GS10: instrument plus antenna; two fully charged GEB222 batteries.
- GS15: instrument; two fully charged GEB212 batteries.
- room temperature. Operating times will be shorter when working in cold weather.

Equipment			Operating time
Type	Radio	Digital cellular phone	
Static (GS10)	-	-	27 h continuously
Static (GS15)	-	-	19 h continuously
Rover (GS10)	SATELLINE M3-TR1, receive (GFU27)	-	20 h continuously
Rover (GS15)	SATELLINE M3-TR1, receive (SLR5)	-	10 h continuously
Rover (GS10)	-	Telit UC864-G (GFU28) Cinterion PXS8 (GFU29)	19 h continuously
Rover (GS15)	-	Telit UC864-G (SLG1)	7.5 h continuously

Electrical data

Type	GS15
Voltage	-
Current	-
Frequency	GPS L1 1575.42 MHz GPS L2 1227.60 MHz GPS L5 1176.45 MHz GLONASS L1 1602.5625 MHz-1611.5 MHz GLONASS L2 1246.4375 MHz-1254.3 MHz Galileo E1 1575.42 MHz Galileo E5a 1176.45 MHz Galileo E5b 1207.14 MHz Galileo Alt-BOC 1191.795 MHz BeiDou B1 1561.098 MHz BeiDou B2 1207.14 MHz
Gain	Typically 27 dBi
Noise Figure	Typically < 2 dBi



Galileo Alt-BOC covers bandwidth of Galileo E5a and E5b.

Environmental specifications

Temperature

Type	Operating temperature [°C]	Storage temperature [°C]
All instruments	-40 to +65	-40 to +80
Leica SD cards	-40 to +80	-40 to +80
Battery internal	-20 to +55	-40 to +70

Protection against water, dust and sand

Type	Protection
All instruments	IP68 (IEC 60529) Dust tight Protected against continuous immersion in water Tested for 2 h in 1.40 m depth

Humidity

Type	Protection
All instruments	Up to 100 % The effects of condensation are to be effectively counteracted by periodically drying out the instrument.

Description and use The antenna is selected for use based upon the application. The table gives a description and the intended use of the individual antennas.

Type	Description	Use
AS05	L1 SmartTrack antenna with built-in ground plane.	With GS05/GS06 or GS10/GS25.
AS10	GPS, GLONASS, Galileo, BeiDou SmartTrack antenna with built-in ground plane.	With GS10/GS25.
AR10	GPS, GLONASS, Galileo, BeiDou antenna with large ground plane and built-in radome.	With GS10/GS25 where higher precision is required. For example static surveys of long baselines, tectonic plate monitoring and base stations.
AR20	GPS, GLONASS, Galileo, BeiDou, QZSS reference station and monitoring antenna with gold choke ring ground plane. Optional protective radome.	High end applications, including all reference station and monitoring. Especially suited for Network RTK, where excellent multipath rejection and the best phase centre stability is required.
AR25	Dorne & Margolin GPS, GLONASS, Galileo, BeiDou antenna element with 3D choke ring ground plane. Optional protective radome.	With GS10/GS25 where higher precision is required. For example static surveys of long baselines, tectonic plate monitoring and base stations.

Dimensions

Type	AS05/AS10	AR10	AR20	AR25
Height	6.2 cm	14.0 cm	16.3 cm	20.0 cm
Diameter	17.0 cm	24.0 cm	32.0 cm	38.0 cm

Connector

AS05/AS10/AR10:	TNC female
AR20/AR25:	N female

Mounting

All antennas:	5/8" Whitworth
---------------	----------------

Weight

AS05/AS10:	0.4 kg
AR10:	1.1 kg
AR20:	5.9 kg
AR25:	7.6 kg, radome 1.1 kg

Electrical data

Type	AS05	AS10	AR10	AR20	AR25
Voltage	4.5 V to 18 V DC	4.5 V to 18 V DC	3.3 V to 12 V DC	3.3 V to 12 V DC	3.3 V to 12 V DC
Current	35 mA typ.	35 mA typ.	100 mA max	100 mA max	100 mA max
Frequency					
GPS L1 1575.42 MHz	✓	✓	✓	✓	✓
GPS L2 1227.60 MHz	-	✓	✓	✓	✓
GPS L5 1176.45 MHz	-	✓	✓	✓	✓
GLONASS L1 1602.5625- 1611.5 MHz	✓	✓	✓	✓	✓
GLONASS L2 1246.4375- 1254.3 MHz	-	✓	✓	✓	✓
GLONASS L3	-	-	✓	✓	✓
GLONASS L5	-	-	-	✓	-
Galileo E1 1575.42 MHz	-	✓	✓	✓	✓
Galileo E5a 1176.45 MHz	-	✓	✓	✓	✓
Galileo E5b 1207.14 MHz	-	✓	✓	✓	✓
Galileo Alt-BOC 1191.795 MHz	-	✓	✓	✓	✓
Galileo E6 1278.75 MHz	-	-	✓	✓	✓
BeiDou B1 1561.098 MHz	✓	✓	✓	✓	✓
BeiDou B2 1207.14 MHz	-	✓	✓	✓	✓
BeiDou B3 1268.52 MHz	-	-	✓	✓	✓
Gain (typically)	27 dBi	29 dBi	29 dBi	29 dBi	40 dBi
Noise Figure (typically)	< 2 dBi	< 2 dBi	< 2 dBi	< 2 dBi	< 1.2 dBi max



Galileo Alt-BOC covers bandwidth of Galileo E5a and E5b.

Environmental specifications**Temperature**

Type	Operating temperature [°C]	Storage temperature [°C]
AS05/AS10/AR10	-40 to +70	-55 to +85
AR20/AR25	-55 to +85	-55 to +90

Protection against water, dust and sand

Type	Protection
AS05/AS10	IP68 (IEC 60529) Dust tight Protected against water jets Protected against continuous immersion in water Tested for 2 h in 1.40 m depth
AR10/AR20/AR25	IP67 (IEC 60529) Dust tight Protected against water jets Waterproof to 1 m temporary immersion

Humidity

Type	Protection
All antennas	Up to 100 % The effects of condensation are to be effectively counteracted by periodically drying out the antenna.

Cable length

Separation distance from instrument ...	to antenna	Supplied cable lengths [m]	Optional cable lengths [m]
GS10/GS25	AS05/AS10/ AR10/AR25	1.2 2.8 10	30 50 70

6.3

Conformity to National Regulations

Conformity to national regulations

For products which do not fall under R&TTE directive:



Hereby, Leica Geosystems AG, declares that the product/s is/are in compliance with the essential requirements and other relevant provisions of the applicable European Directives. The declaration of conformity can be consulted at <http://www.leica-geosystems.com/ce>.

- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

6.3.1

GS10

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the product GS10 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The declaration of conformity can be consulted at <http://www.leica-geosystems.com/ce>.



Class 1 equipment according European Directive 1999/5/EC (R&TTE) can be placed on the market and be put into service without restrictions in any EEA member state.

- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance (applicable for Japan).
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

Type	Frequency band [MHz]
GS10	1176.45 1191.795 1207.14 1227.60 1246.4375 - 1254.3 1575.42 1602.4375 - 1611.5
Bluetooth	2402 - 2480

Output power

Type	Output power [mW]
GNSS	Receive only
Bluetooth	5 (Class 1)

Antenna

Type	Antenna	Gain [dBi]	Connector	Frequency band [MHz]
GNSS	External GNSS antenna element (receive only)	-	-	-
Bluetooth	Internal Microstrip antenna	1.5	-	-

6.3.2

GS15

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the product GS15 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The declaration of conformity can be consulted at <http://www.leica-geosystems.com/ce>.



Class 1 equipment according European Directive 1999/5/EC (R&TTE) can be placed on the market and be put into service without restrictions in any EEA member state.

- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance (applicable for Japan).
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

Type	Frequency band [MHz]
GS15	1176.45 1191.795 1207.14 1227.60 1246.4375 - 1254.3 1561.098 1575.42 1602.4375 - 1611.5
Bluetooth	2402 - 2480

Output power

Type	Output power [mW]
GNSS	Receive only
Bluetooth	5 (Class 1)

Antenna

Type	Antenna	Gain [dBi]	Connector	Frequency band [MHz]
GNSS	Internal GNSS antenna element (receive only)	-	-	-
Bluetooth	Internal Microstrip antenna	1.5	-	-

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the GFU24 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The declaration of conformity may be consulted at <http://www.leica-geosystems.com/ce>.



Class 1 equipment according European Directive 1999/5/EC (R&TTE) can be placed on the market and be put into service without restrictions in any EEA Member state.

- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

Quad-Band EGSM850 MHz/ EGSM900 MHz/ GSM1800 MHz/ GSM1900 MHz

Output power

EGSM850/900: 2 W
GSM1800/1900: 1 W

Antenna

Type	GAT3	GAT5	GAT18
Frequency band [MHz]	890 - 960 / 1710 - 1880 / 1920 - 2170	824 - 894 / 1850 - 1990	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170
Type	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	TNC	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

- Conformity to national regulations**
- FCC Part 15, 22 and 24 (applicable in US)
 - The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 has to be approved prior to use and operation.
 - Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band Dual-Band CDMA850 MHz/CDMA1900 MHz

Output power

CDMA850:	2 W
CDMA1900:	0.4 W

Antenna

Type	GAT5	GAT18
Frequency band [MHz]	824 - 894 / 1850 -1990	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170
Type	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	TNC	TNC

Specific Absorption Rate (SAR) The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the GFU28 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The declaration of conformity may be consulted at <http://www.leica-geosystems.com/ce>.



Class 1 equipment according European Directive 1999/5/EC (R&TTE) can be placed on the market and be put into service without restrictions in any EEA Member state.

- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

UMTS/HSDPA (WCDMA/FDD) 850 MHz/ 1900 MHz/ 2100 MHz
 Quad-Band EGSM 850 MHz/ 900 MHz/ 1800 MHz/ 1900 MHz
 GPRS multi-slot class 12
 EDGE multi-slot class 12

Output power

EGSM850/900: 2 W
 GSM1800/1900: 1 W
 UMTS2100: 0.25 W
 EDGE850/900: 0.5 W
 EDGE1800/1900: 0.4 W

Antenna

Type	GS15 Internal	GAT3	GAT5	GAT18
Frequency band [MHz]	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170	890 - 960 / 1710 - 1880 / 1920 - 2170	824 - 894 / 1850 - 1990	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170
Type	Internal	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	-	TNC	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the GFU29 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The declaration of conformity may be consulted at <http://www.leica-geosystems.com/ce>.



Class 1 equipment according European Directive 1999/5/EC (R&TTE) can be placed on the market and be put into service without restrictions in any EEA Member state.

- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

UMTS/HSPA (WCDMA/FDD) 800 MHz/ 850 MHz/ 900 MHz/ 1900 MHz/ 2100 MHz
(E)GSM 850 MHz/ 900 MHz/ 1800 MHz/ 1900 MHz
GPRS/EDGE multi-slot class 12

Output power

UMTS/HSPA: 0.25 W
EGSM850/900: 2 W (EDGE: 0.5 W)
GSM1800/1900: 1 W (EDGE: 0.4 W)

Antenna

Type	GAT3	GAT5	GAT18
Frequency band [MHz]	890 - 960 / 1710 - 1880 / 1920 - 2170	824 - 894 / 1850 - 1990	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170
Type	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	TNC	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

Conformity to national regulations

- FCC Part 15 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the product SLR1, SLR2 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC and other applicable European Directives. The declaration of conformity can be consulted at <http://www.leica-geosystems.com/ce>.

- This Class 2 equipment may be operated in: AT, BE, CY, CZ, DK, EE, FI, FR, DE, GR, HU, IE, IT, LV, LT, LU, MT, NL, PL, PT, SK, SI, ES, SE, GB, IS, LI, NO, CH, BG, RO and TR.



Class 2 equipment according European Directive 1999/5/EC (R&TTE) for which following EEA Member States apply restrictions on the placing on the market or on the putting into service or require authorisation for use:

- France
- Italy
- Norway (if used in the geographical area within a radius of 20km from the centre of Ny-Ålesund)
- The conformity for countries with other national regulations not covered by the FCC part 15 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

403 MHz - 470 MHz

Output power

SLR1: 0.5 W-1.0 W
SLR2: Receive only

Antenna

Type	Internal	GAT1	GAT2
Frequency band [MHz]	400 - 470	400 - 435	435 - 470
Type	Internal	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	-	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

Conformity to national regulations

- FCC Part 15 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the product SLR5 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC and other applicable European Directives. The declaration of conformity can be consulted at <http://www.leica-geosystems.com/ce>.
- This Class 2 equipment may be operated in: AT, BE, CY, CZ, DK, EE, FI, FR, DE, GR, HU, IE, IT, LV, LT, LU, MT, NL, PL, PT, SK, SI, ES, SE, GB, IS, LI, NO, CH, BG, RO and TR.



Class 2 equipment according European Directive 1999/5/EC (R&TTE) for which following EEA Member States apply restrictions on the placing on the market or on the putting into service or require authorisation for use:

- France
- Italy
- Norway (if used in the geographical area within a radius of 20km from the centre of Ny-Ålesund)
- The conformity for countries with other national regulations not covered by the FCC part 15 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

403 MHz - 470 MHz

Output power

SLR5: 0.5 W-1.0 W

Antenna

Type	Internal	GAT1	GAT2
Frequency band [MHz]	400 - 470	400 - 435	435 - 470
Type	Internal	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	-	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

Conformity to national regulations

- FCC Part 15 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the product SLR3-1, SLR3-2 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC and other applicable European Directives. The declaration of conformity can be consulted at <http://www.leica-geosystems.com/ce>.
- This Class 2 equipment may be operated in: AT, BE, CY, CZ, DK, EE, FI, FR, DE, GR, HU, IE, IT, LV, LT, LU, MT, NL, PL, PT, SK, SI, ES, SE, GB, IS, LI, NO, CH, BG, RO and TR.



Class 2 equipment according European Directive 1999/5/EC (R&TTE) for which following EEA Member States apply restrictions on the placing on the market or on the putting into service or require authorisation for use:

- France
- Italy
- Norway (if used in the geographical area within a radius of 20km from the centre of Ny-Ålesund)
- The conformity for countries with other national regulations not covered by the FCC part 15 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

SLR3-1:	390 MHz - 430 MHz
SLR3-2:	430 MHz - 470 MHz

Output power

SLR3-1:	0.5 W-1 W
SLR3-2:	0.5 W-1 W

Antenna

Type	Internal	GAT1	GAT2
Frequency band [MHz]	400 - 470	400 - 435	435 - 470
Type	Internal	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	-	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the SLG1 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC and other applicable European Directives. The declaration of conformity may be consulted at <http://www.leica-geosystems.com/ce>.



Class 1 equipment according European Directive 1999/5/EC (R&TTE) can be placed on the market and be put into service without restrictions in any EEA Member state.

- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

UMTS/HSDPA (WCDMA/FDD) 850 MHz/ 1900 MHz/ 2100 MHz
 Quad-Band EGSM 850 MHz/ 900 MHz/ 1800 MHz/ 1900 MHz
 GPRS multi-slot class 12
 EDGE multi-slot class 12

Output power

EGSM850/900: 2 W
 GSM1800/1900: 1 W
 UMTS2100: 0.25 W
 EDGE850/900: 0.5 W
 EDGE1800/1900: 0.4 W

Antenna

Type	GS15 Internal	GAT3	GAT5	GAT18
Frequency band [MHz]	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170	890 - 960 / 1710 - 1880 / 1920 - 2170	824 - 894 / 1850 - 1990	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170
Type	Internal	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	-	TNC	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US)
- Hereby, Leica Geosystems AG, declares that the SLG2 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC and other applicable European Directives. The declaration of conformity may be consulted at <http://www.leica-geosystems.com/ce>.



Class 1 equipment according European Directive 1999/5/EC (R&TTE) can be placed on the market and be put into service without restrictions in any EEA Member state.

- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

Quad-Band EGSM850 MHz/ EGSM900 MHz/ GSM1800 MHz/ GSM1900 MHz

Output power

EGSM850/900: 2 W
GSM1800/1900: 1 W

Antenna

Type	GS15 Internal	GAT3	GAT5	GAT18
Frequency band [MHz]	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170	890 - 960 / 1710 - 1880 / 1920 - 2170	824 - 894 / 1850 - 1990	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170
Type	Internal	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	-	TNC	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

6.3.12

SLC1 (US), SLC2 (US) CDMA Telit CC864-DUAL

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US)
- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

Dual-Band CDMA800 MHz/CDMA1900 MHz

Output power

CDMA800: 0.27 W
CDMA1900: 0.4 W

Antenna

Type	Internal	GAT5	GAT18
Frequency band [MHz]	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170	824 - 894 / 1850 - 1990	824 - 894 / 890 - 960 / 1710 - 1880 / 1850 - 1990 / 1920 - 2170
Type	Internal	Detachable $\lambda/2$ antenna	Detachable $\lambda/2$ antenna
Connector	-	TNC	TNC

Specific Absorption Rate (SAR)

The product meets the limits for the maximum permissible exposure of the guide-lines and standards which are force in this respect. The product must be used with the recommended antenna. A separation distance of at least 20 centimetres should be kept between the antenna and the body of the user or nearby person within the intended application.

Software Licence Agreement

This product contains software that is preinstalled on the product, or that is supplied to you on a data carrier medium, or that can be downloaded by you online according to prior authorisation from Leica Geosystems. Such software is protected by copyright and other laws and its use is defined and regulated by the Leica Geosystems Software Licence Agreement, which covers aspects such as, but not limited to, Scope of the Licence, Warranty, Intellectual Property Rights, Limitation of Liability, Exclusion of other Assurances, Governing Law and Place of Jurisdiction. Please make sure, that at any time you fully comply with the terms and conditions of the Leica Geosystems Software Licence Agreement.

Such agreement is provided together with all products and can also be referred to and downloaded at the Leica Geosystems home page at <http://www.leica-geosystems.com/swlicense> or collected from your Leica Geosystems distributor.

You must not install or use the software unless you have read and accepted the terms and conditions of the Leica Geosystems Software Licence Agreement. Installation or use of the software or any part thereof, is deemed to be an acceptance of all the terms and conditions of such Licence Agreement. If you do not agree to all or some of the terms of such Licence Agreement, you must not download, install or use the software and you must return the unused software together with its accompanying documentation and the purchase receipt to the distributor from whom you purchased the product within ten (10) days of purchase to obtain a full refund of the purchase price.


Appendix A Pin Assignments and Sockets

A.1 GS10

Description

Some applications require knowledge of the pin assignments for the GS10 ports. In this chapter, the pin assignments and sockets for the ports of the GS10 are explained.

Ports at the instrument front panel

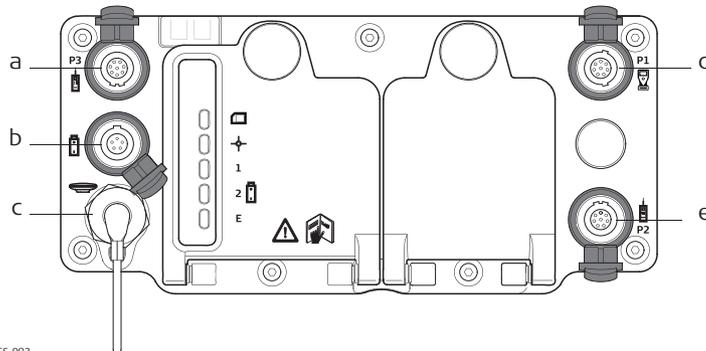


- a) Port P3: Power out, data in/out or remote interface in/out. 8 pin LEMO
- b) Port PWR: Power in. 5 pin LEMO
- c) Port ANT: GNSS antenna in
- d) Port P1: CS field controller in/out or remote interface in/out. 8 pin LEMO
- e) Port P2: Power out, data in/out or remote interface in/out. 8 pin LEMO

Pin assignments for port P1




Pin	Signal Name	Function	Direction
1	USB_D+	USB data line	In or out
2	USB_D-	USB data line	In or out
3	GND	Signal ground	-
4	RxD	RS232, receive data	In
5	TxD	RS232, transmit data	Out
6	ID	Identification pin	In or out
7	PWR	Power input, 10.5 V-28 V	In
8	TRM_ON/USB_ID	RS232, general-purpose signal	In or out

Pin assignments for port P2, and port P3



Pin	Signal Name	Function	Direction
1	RTS	RS232, ready to send	Out
2	CTS	RS232, clear to send	In
3	GND	Signal ground	-
4	RxD	RS232, receive data	In
5	TxD	RS232, transmit data	Out
6	ID	Identification pin	In
7	GPIO	RS232, configurable function	In or out
8	+12 V	12 V power supply out	Out

Pin assignments for port PWR



Pin	Signal Name	Function	Direction
1	PWR1	Power input, 11 V-28 V	In
2	ID1	Identification pin	In
3	GND	Signal ground	-
4	PWR2	Power input, 11 V-28 V	In
5	ID2	Identification pin	In

Sockets

Port P1	LEMO-1, 8 pin, LEMO EGI.1B.308.CLN
Port P2 and port P3:	LEMO-1, 8 pin, LEMO HMA.1B.308.CLNP
Port PWR:	LEMO-1, 5 pin, LEMO HMG.1B.305.CLNP


A.2

GS15

Description

Some applications require knowledge of the pin assignments for the GS15 ports. In this chapter, the pin assignments and sockets for the ports of the GS15 are explained.

Ports at the instrument underside

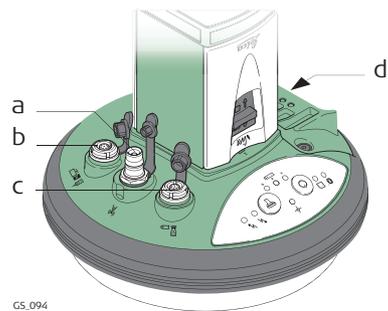

GS_094

- a) QN-connector
- b) Port 2
- c) Port 1 (USB and serial)
- d) Port 3

Pin assignments for port P1




Pin	Signal Name	Function	Direction
1	USB_D+	USB data line	In or out
2	USB_D-	USB data line	In or out
3	GND	Signal ground	-
4	RxD	RS232, receive data	In
5	TxD	RS232, transmit data	Out
6	ID	Identification pin	In or out
7	PWR	Power input, 10.5 V-28 V	In
8	TRM_ON/USB_ID	RS232, general-purpose signal	In or out

Pin assignments for port P2



Pin	Signal Name	Function	Direction
1	RTS	RS232, ready to send	Out
2	CTS	RS232, clear to send	In
3	GND	Signal ground	-
4	RxD	RS232, receive data	In
5	TxD	RS232, transmit data	Out
6	ID	Identification pin	In
7	GPIO	RS232, configurable function	In or out
8	+12 V	12 V power supply out	Out

Pin assignments for port P3



Pin	Signal Name	Function	Direction
1	PWR	4 V power supply in	In
2	Tx	Transmit data	In
3	Rx	Receive data	Out
4	GPO/DCD	General-purpose out, carrier detect out	Out
5	RTS	Request to send	In
6	CTS	Clear to send	Out
7	GPI/CFG	General-purpose in, config mode in	In
8	PWR	6 V power supply in	In
9	GPIO	General-purpose signal	In or out
10	GND	Signal and chassis ground	-
11	USB+	USB data line (+)	In or out
12	USB-	USB data line (-)	In or out
13	GND	Signal and chassis ground	-
14	ID	Identification pin	In or out
15	GPIO	General-purpose signal	In or out
A1	NC	Not used	-
A2	RF1	Antenna port, radio to antenna	-

Sockets

Port 1:	LEMO-1, 8 pin, LEMO EGI.1B.308.CLN
Port 2:	LEMO-1, 8 pin, LEMO HMA.1B.308.CLNP
Port 3:	15 pin RS232:RS232, 15 pin, DE15

772916-6.0.0en

Original text

Printed in Switzerland

© 2014 Leica Geosystems AG, Heerbrugg, Switzerland

Leica Geosystems AG

Heinrich-Wild-Strasse

CH-9435 Heerbrugg

Switzerland

Phone +41 71 727 31 31

www.leica-geosystems.com

- when it has to be **right**

Leica
Geosystems